


SILT FENCE FOR TEMPORARY EROSION CONTROL
(NOT TO SCALE)
DETAIL "A"

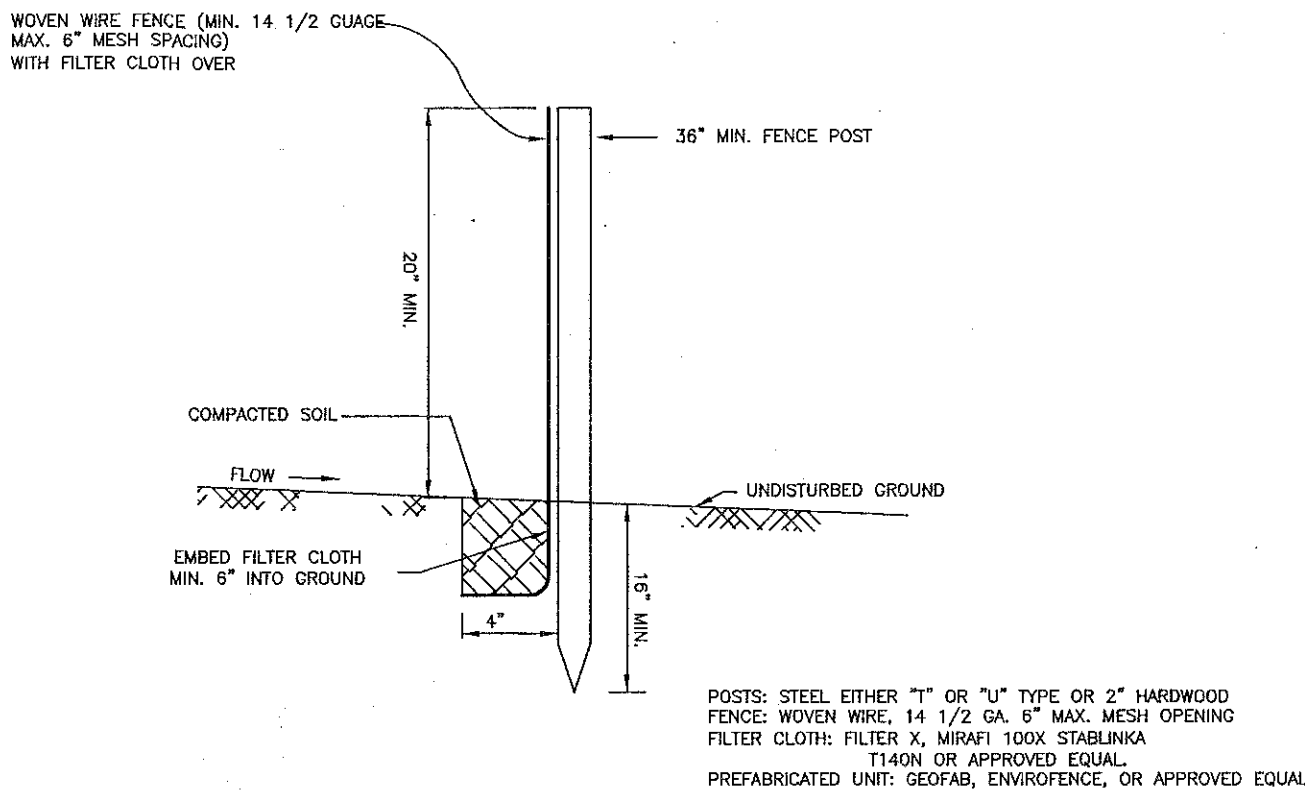

SILT FENCE FOR TEMPORARY EROSION CONTROL
(NOT TO SCALE)
DETAIL "B"

1. Inspect sediment fences periodically and after each rainfall event.
2. Should fabric tear, decompose, or in any way become ineffective, replace it immediately.
3. Remove sediment deposits promptly to provide adequate storage volume for the next rain and reduce pressure on fence. Take care to avoid undermining fence during cleanup.
4. Remove all fencing materials and unstable sediment deposits after the contributing drainage area has been properly stabilized, inspected, and approved. Grade and stabilize the disturbed area as shown in the vegetation plan.

SILT FENCE FOR TEMPORARY EROSION CONTROL
MAINTENANCE NOTES

SEEDING

SEEDING: (TEMPORARY)

SPRING, SUMMER & EARLY FALL: RYEGRASS @ 1 lb / 1,000 Sq. Ft.

LATE FALL & EARLY WINTER: CERTIFIED AROSTOOK WINTER RYE @ 2.5 lbs / 1,000 Sq. Ft.

MULCH: HAY OR STRAW @ 2 TONS / ACRE

MULCH ANCHORING: WOOD FIBER HYDROMULCH OR OTHER SPRAYABLE PRODUCT APPROVED FOR EROSION CONTROL

SEEDING (PERMANENT)

KENTUCKY BLUEGRASS @ 0.6 lbs / 1,000 Sq. Ft.

CREeping FESCUE @ 0.5 lbs / 1,000 Sq. Ft.


PERENNIAL RYEGRASS @ 0.2 lbs / 1,000 Sq. Ft.

EARLY SPRING / LATE AUGUST IS THE BEST PLANTING SEASON


MULCH: STRAW (CEREAL GRAIN) @ 2 TONS / ACRE

MULCH ANCHORING: WOOD FIBER HYDROMULCH @ 500 - 750 lbs / ACRE


FERTILIZER: COMMERCIAL FERTILIZER @ 1 lb / 1,000 Sq. Ft. OF N1, P2 O5 & K20

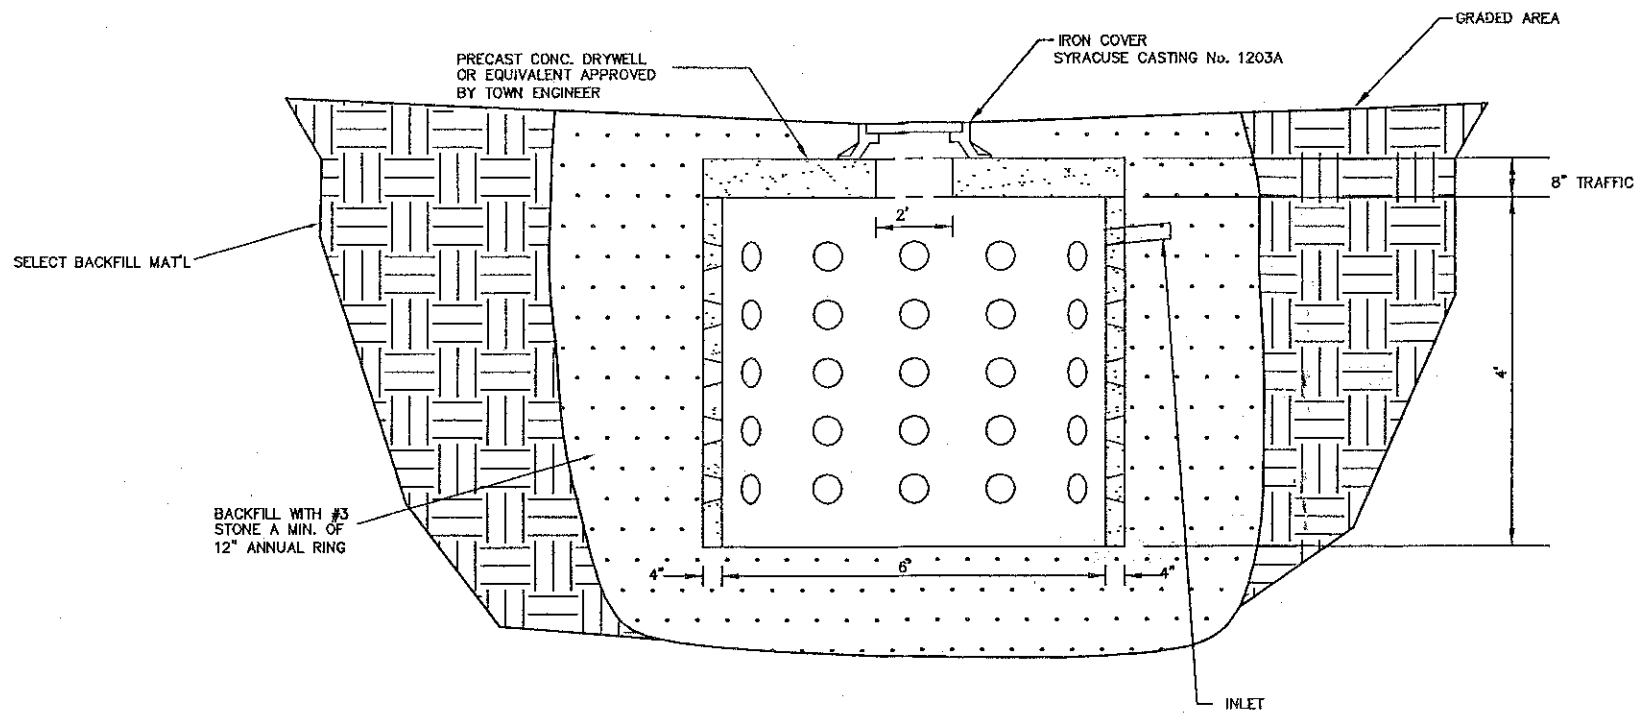


DETAIL "C"
DRYWELL WITH FRAME & COVER
(NOT TO SCALE)

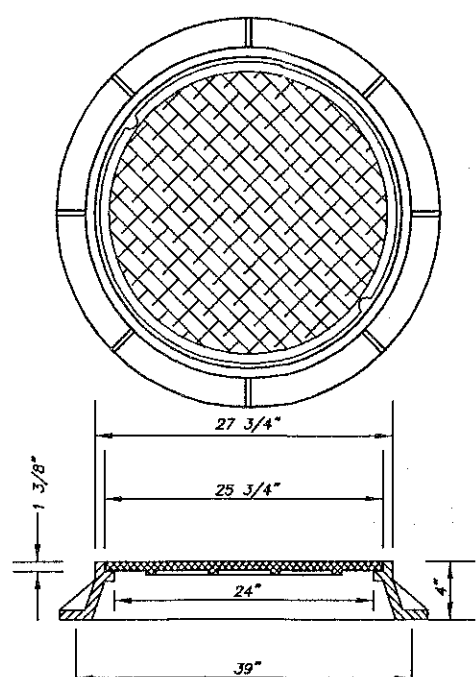


DETAIL "D"
HEAVY DUTY MANHOLE
FRAMES AND COVER
FLARED TYPE FRAME
(NOT TO SCALE)
(FRAME & COVER BY SYRACUSE CASTING PATTERN No. 1203A)

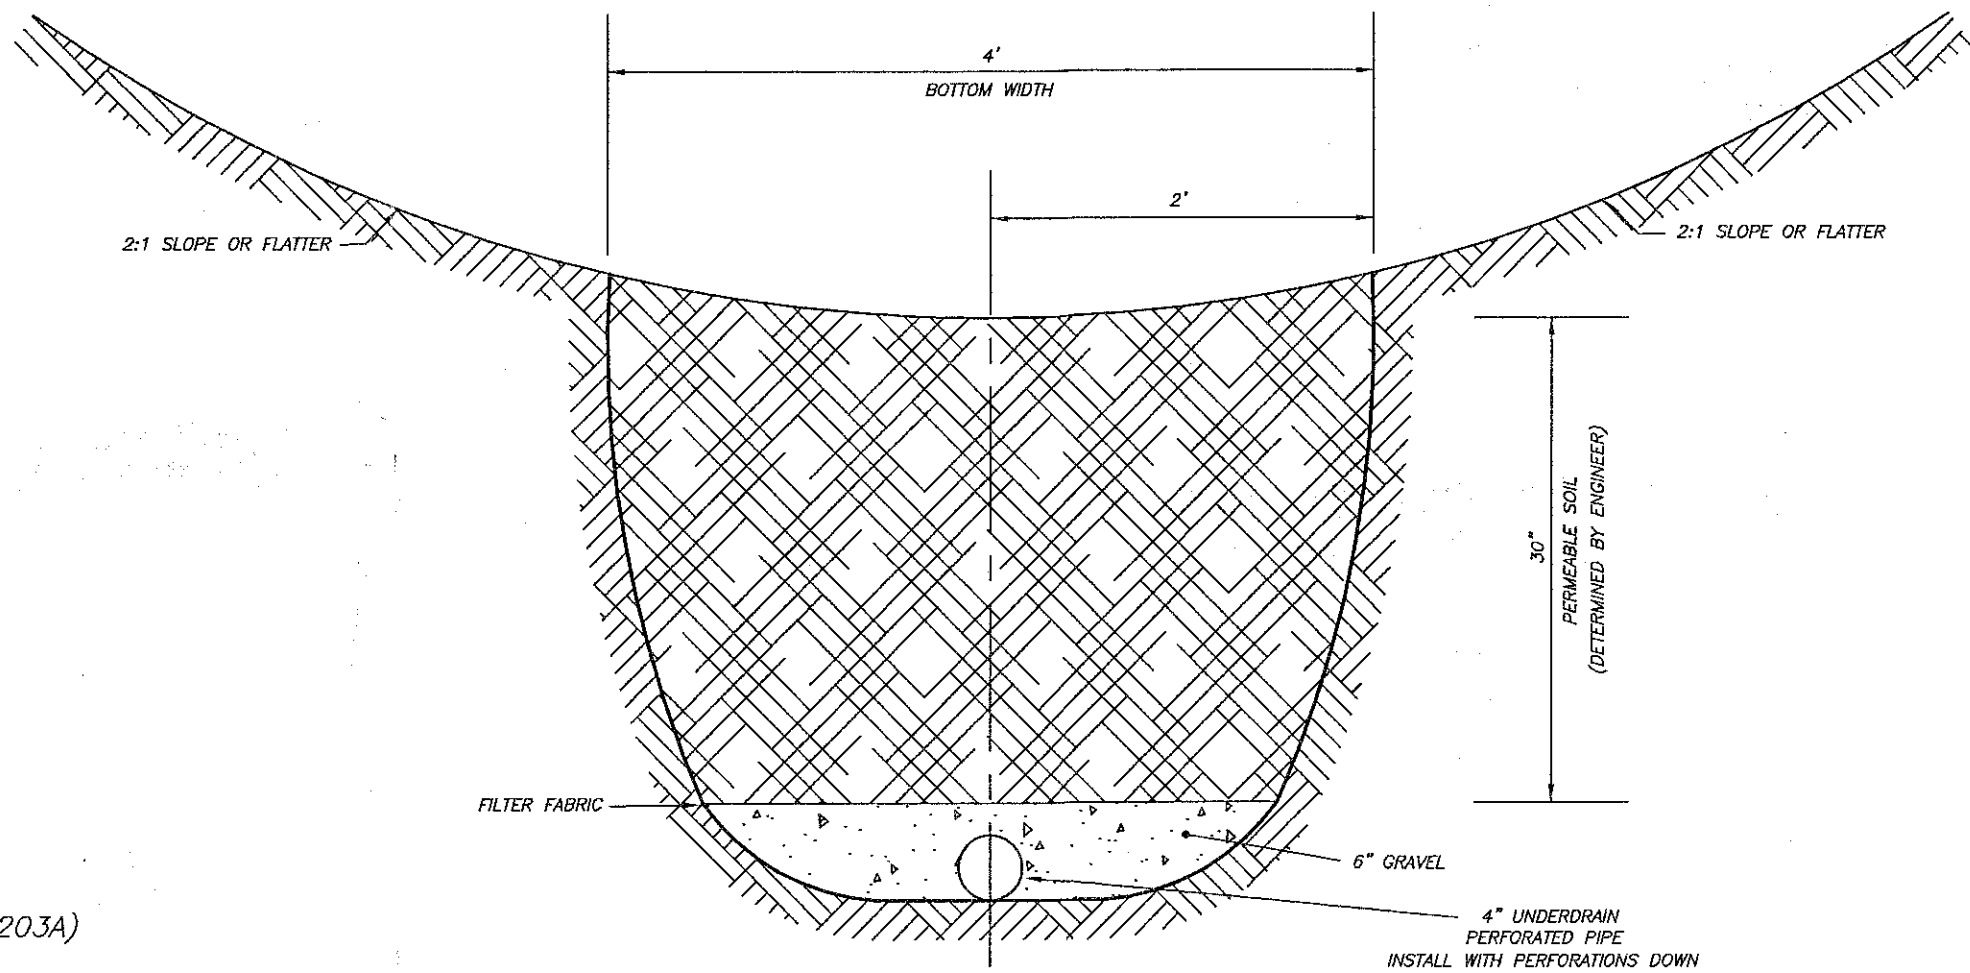


DETAIL "E"
DRY SWALE
(NOT TO SCALE)

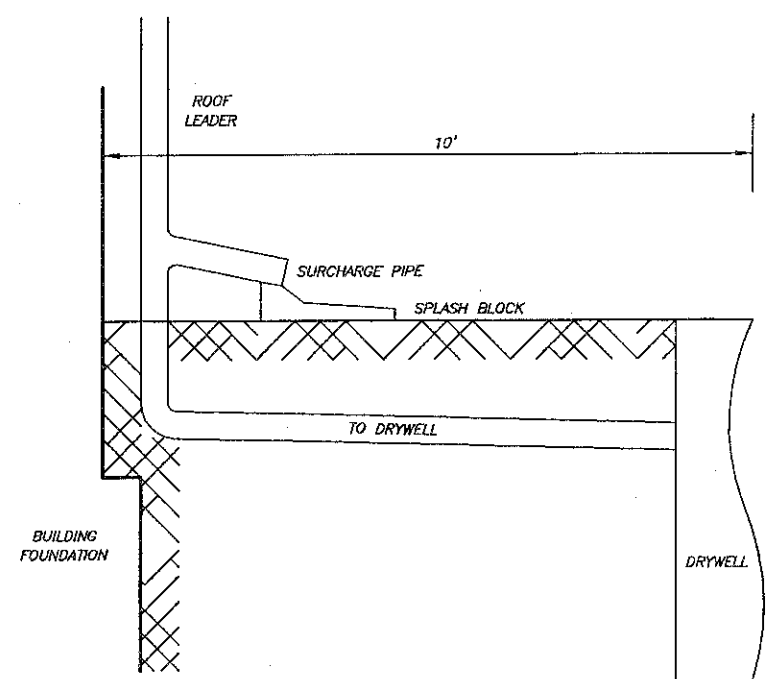


DETAIL "F"
ROOF LEADER
(NOT TO SCALE)

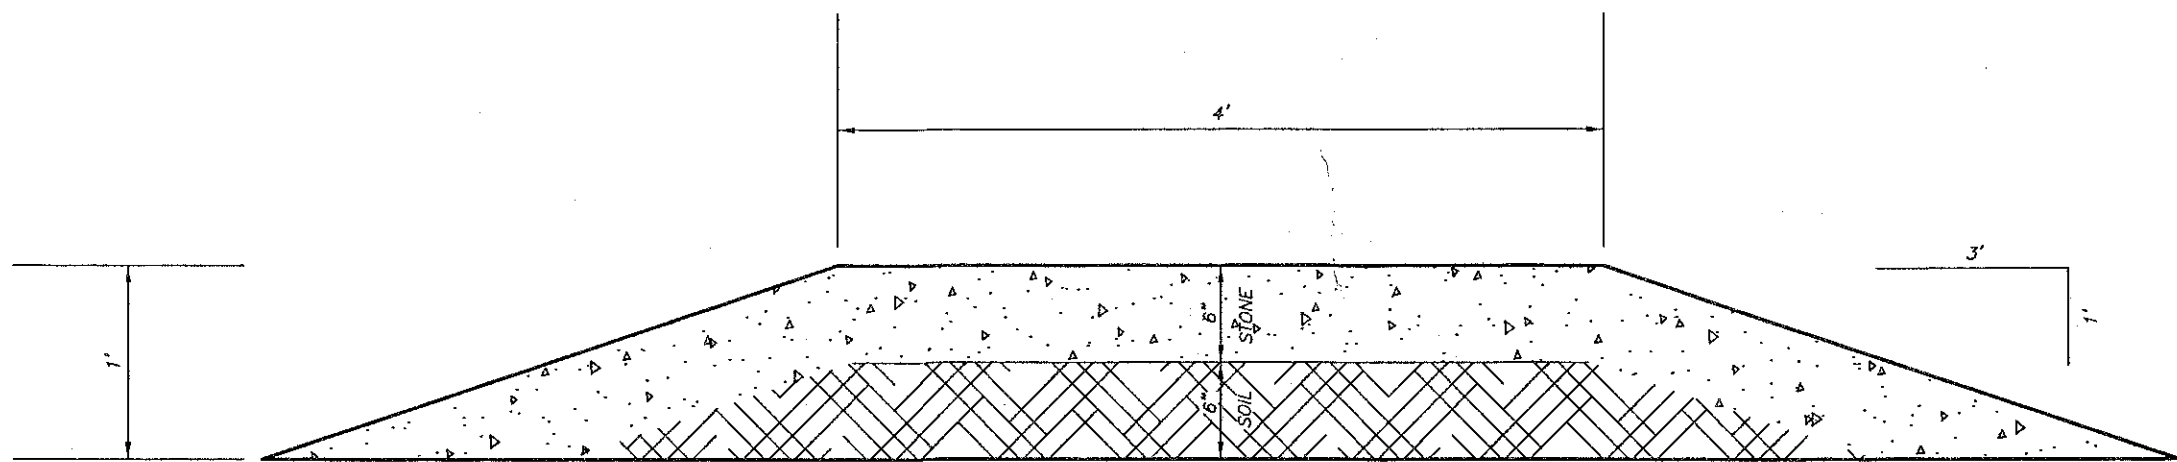

DETAIL "G"
BERM
(NOT TO SCALE)

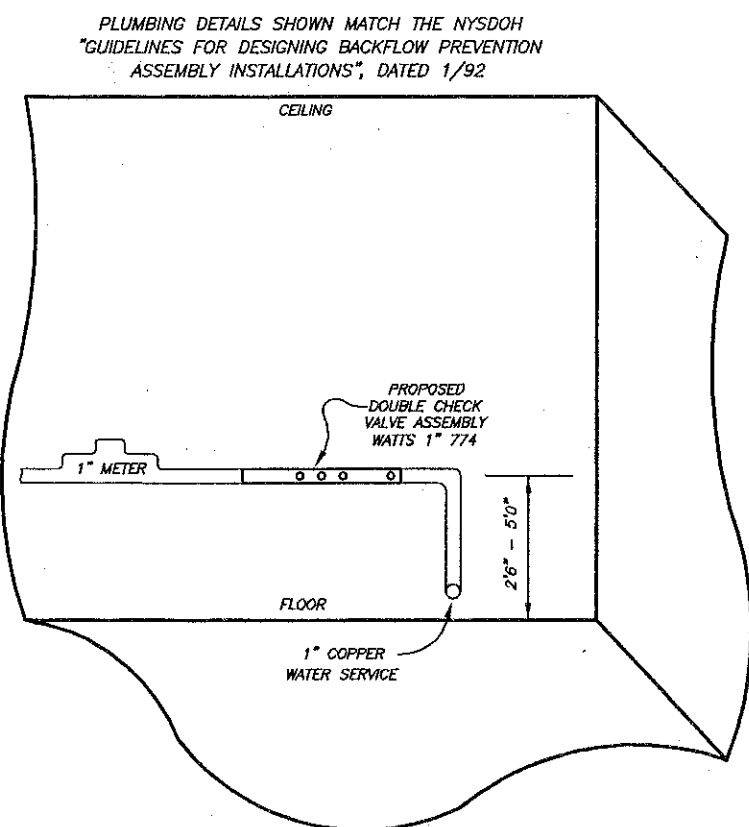




DETAIL "H"
PLUMBING DETAIL
(NOT TO SCALE)

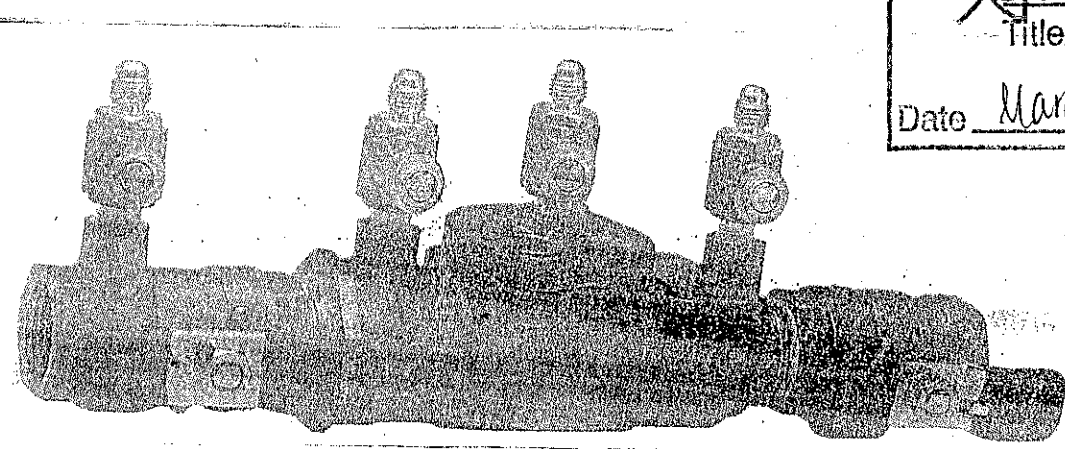

DETAIL "I"
WATTS 1" 774
DOUBLE CHECK VALVE
(NOT TO SCALE)

MINIMUM REQUIRED CLEARANCES AROUND DEVICE

1. ABOVE: 12"
2. FRONT: 30"
3. BACK: 8"
4. CENTERLINE HEIGHT ABOVE FLOOR: 30" - 60"

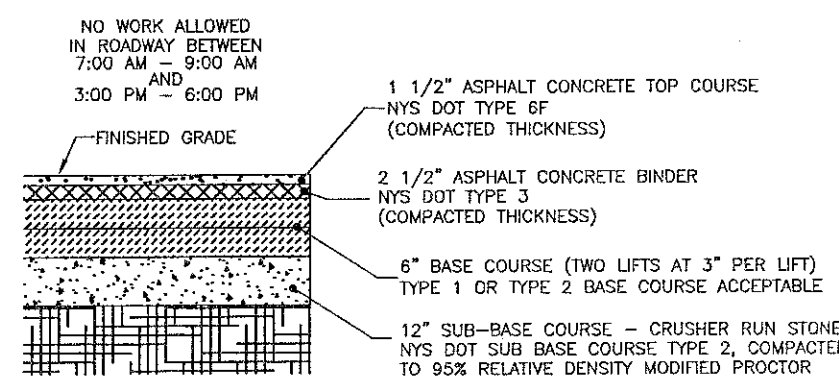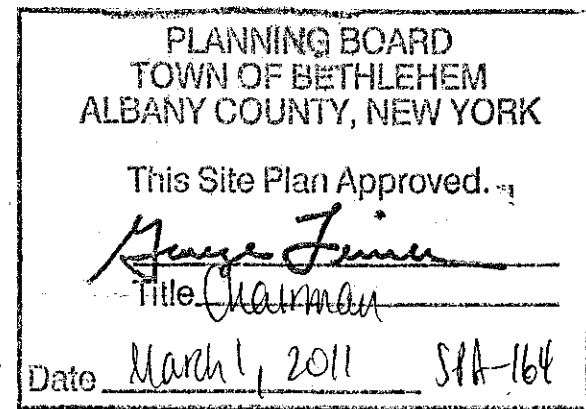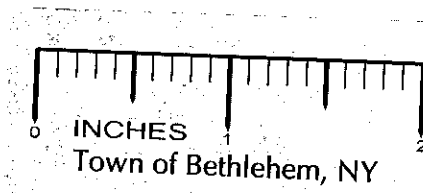

**PAVEMENT WITHIN N.Y.S. RIGHT-OF-WAY
DRIVEWAY DETAIL**
(NOT TO SCALE)

THIS SECTION SHALL EXTEND FROM THE WHITE EDGE PAVEMENT WARNING TO THE R.O.W. OR 10 FEET, WHICHEVER IS LESS. TACK COAT SHALL BE APPLIED TO THE SAW-CUT EDGE PRIOR TO ASPHALT APPLICATION.


DETAILS

LANDS OF SP & E, LLC

St. No. 109

BRIDGE STREET - N.Y.S. ROUTE 396

TOWN OF BETHLEHEM

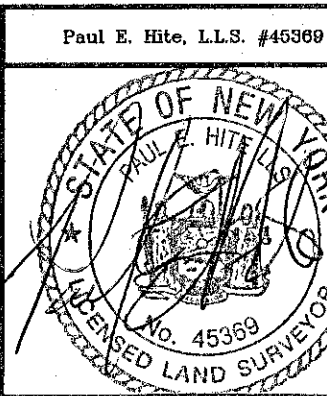

COUNTY:	ALBANY
STATE:	NEW YORK
SCALE:	1" = 50'
DATE:	JULY 13, 2010
DRAWN BY:	SPD MAP NO.: 538SITE

MAP PREPARED BY:
PAUL E. HITE
LICENSED LAND SURVEYOR
230 DELAWARE AVENUE
DELMAR, NEW YORK 12054
(518) 439-4989