


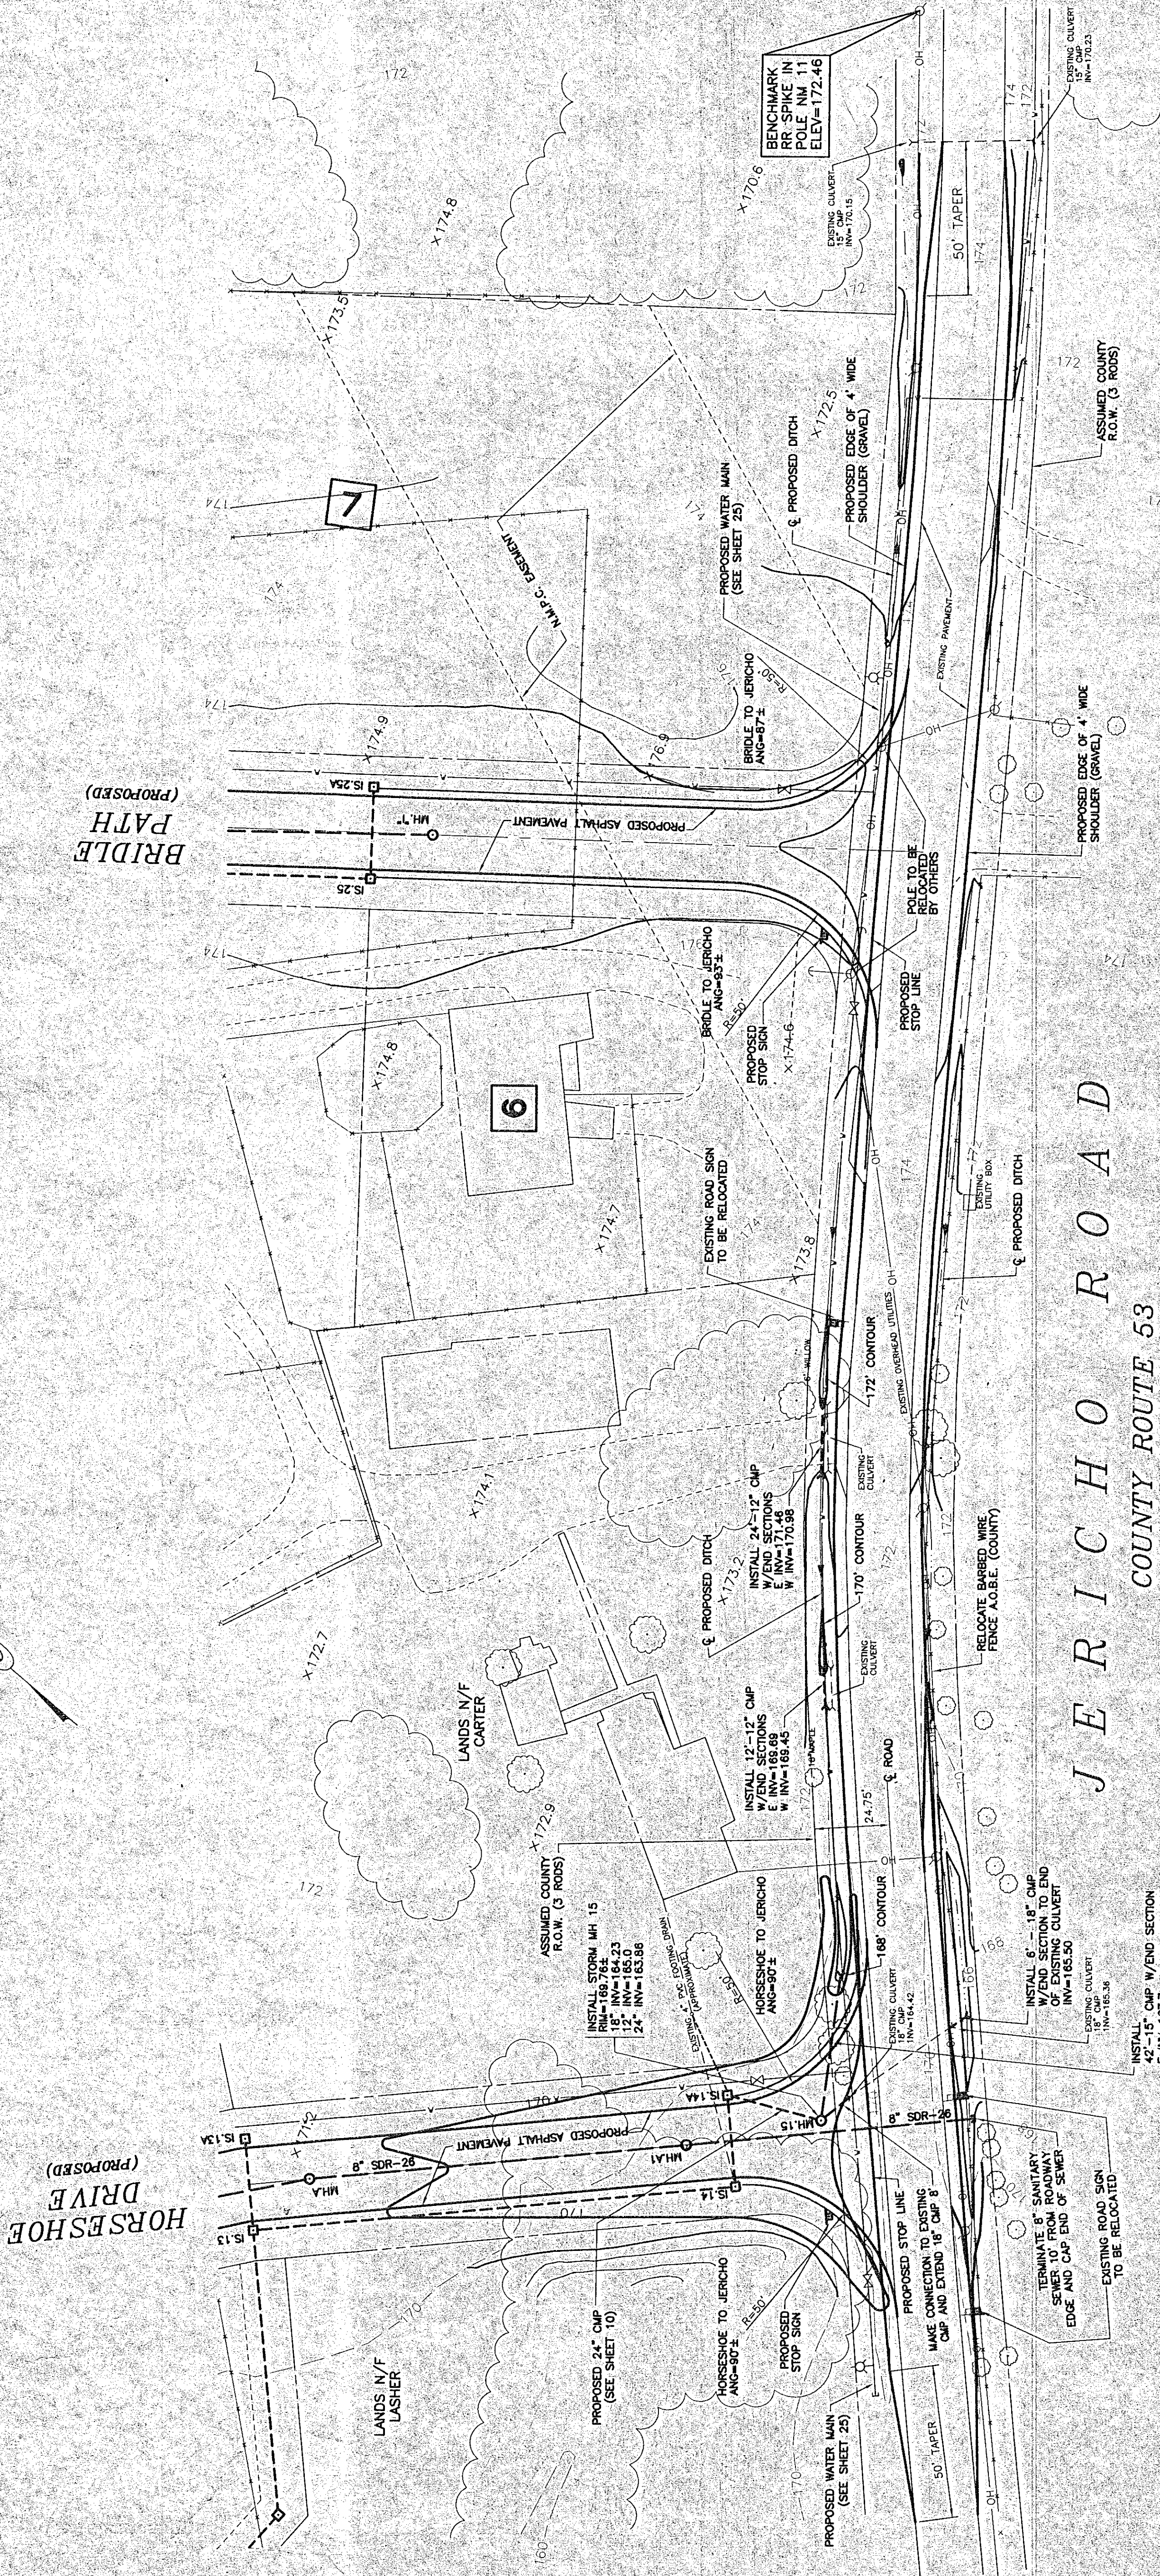

GENERAL NOTES:

1. POWER POLES ARE TO BE RELOCATED BY OTHERS.
2. TREES AND BRUSH SHALL BE CUT, TRIMMED, AND REMOVED TO THE TOP OF THE CURB OR TO THE TOP OF THE DRIVE AND JERICO ROAD TO PROVIDE REQUIRED SIGN DISTANCE.
3. ALL IMPROVEMENTS SHALL BE MADE IN ACCORDANCE WITH THE STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION IN A COUNTY HIGHWAY WORK PERMIT.
4. GRAVEL SHOULDERS SHALL BE FOUR FEET WIDE CRUSHED STONE, NYSDOT ITEM 2, A MINIMUM DEPTH OF 12 INCHES, FOR LENGTH OF PROPOSED IMPROVEMENTS. DITCHES SHALL BE RELOCATED BASED ON LOCATIONS OF PROPOSED GRAVEL SHOULDERS.

EDWARD W. BOUTELLE AND SON
CIVIL ENGINEERS AND SURVEYORS
423 KENWOOD AVENUE
DELMAR, NEW YORK
TEL (516) 439-9981 FAX (516) 439-9982
A DIVISION OF J. KENNETH FRASER AND ASSOCIATES, P.C.

FINAL PLAN
CARRIAGE HILL SUBDIVISION
MAP OF LANDS OF
CARRIAGE HILL DEVELOPMENT CORP. OF ALBANY

TOWN OF BETHLEHEM
STATE OF NEW YORK
COUNTY OF ALBANY
SCALE: AS NOTED

PROJ. SURVEYOR: CHJ
DRAWN BY: TWK
ASSEMBLED BY: TWK
CHECKED BY: CHJ

PROJECT NO. 98-020
JOB FILE NAME: 7135-024

SHEET TITLE:
JERICO ROAD IMPROVEMENTS

DATE: AUGUST 21, 1998

SHEET 24 OF 26

ALBANY COUNTY DEPARTMENT OF HEALTH
DIVISION OF ENVIRONMENTAL HEALTH SERVICES
By direct order of the Commissioner of Health, these
plans are hereby approved. See list sheet for
date and signature.

