
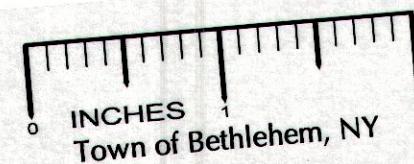


FEURA BUSH ROAD ENTRANCE

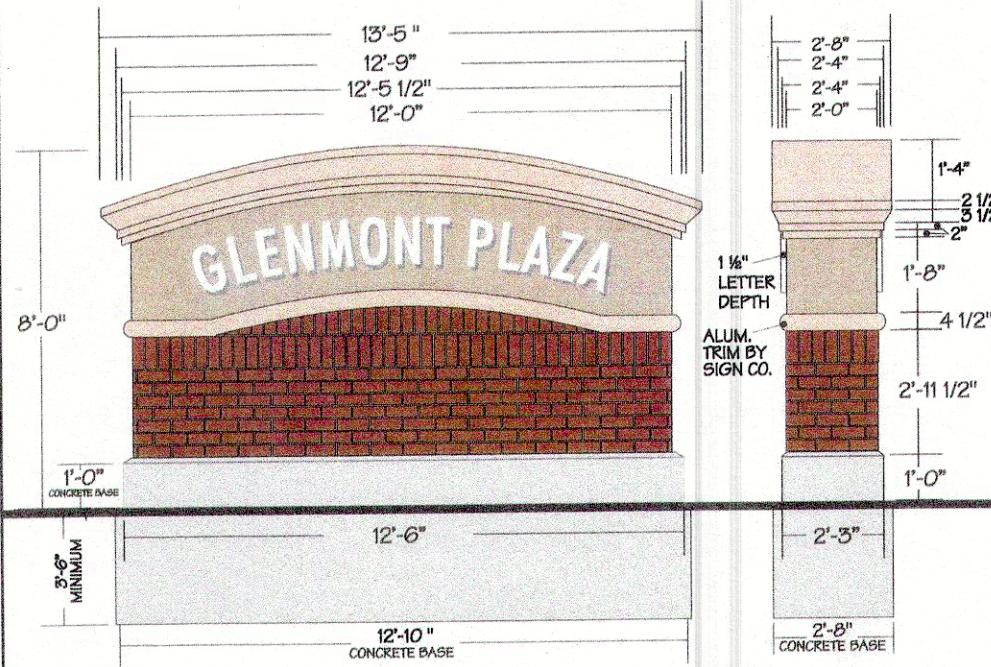

SPECIFICATIONS/ NON-ILLUMINATED SIGN

DECORATIVE CORNICE AND TRIM: FAB. 090" ALUM. W/ 1 1/2" ALUM. ANGLE FRAMEWORK TO PREVENT DEFLECTION. THE BOTTOM OF THE CABINET WILL NEED TO BE OPEN TO ALLOW OVERLAP OF THE MASONRY "CURVE" WHICH WILL NOT BE SMOOTH, THE BRICK WILL BE STEPPED. CABINET TO BE LAG BOLTED INTO MASONRY.

PLAZA NAME: FAB. NON-ILLUMINATED 12" x 1 1/2" ALUM. DIMENSIONAL CHANNEL LETTERS W/TH .063" ALUMINUM RETURNS, .125" ALUMINUM FACES, PAINTED WHITE WITH A SATIN FINISH. FLUSH STUD AND TEMPLATE MOUNT.

MASONRY: BY OTHERS.

FOUNDATION: SIGN IS TO HAVE FLAT CONCRETE PAD ONE (1) FOOT ABOVE GRADE TO PROVIDE A SMOOTH SURFACE FOR THE MASONRY CONTRACTOR. THE MASONRY COMPANY WILL FIRST INSTALL THE FOUNDATION, AND PROVIDE REBAR COMING OUT (MINIMUM OF 3") OF BASE TO TIE THE WALL INTO. PLAZA CABINET TO BE INSTALLED UPON COMPLETION OF THE MASONRY WORK.

PAINT: ALL METAL SURFACES TO BE PRIMED AND PAINTED WITH AN ACRYLIC POLYURETHANE PAINT. ALL METAL SURFACES TO HAVE A SATIN FINISH.

GENERAL NOTES: MIG WELDED CONSTRUCTION THROUGHOUT, NO RIVETS. FACE SEAMS, IF ANY, TO BE FILLED W/ METAL FILLER AND GROUND SMOOTH TO PROVIDE A SEAMLESS APPEARANCE. ALL EXCAVATED SPOILS ARE TO BE REMOVED FROM THE SITE. AT COMPLETION OF INSTALLATION, ALL SURFACES ARE TO BE CLEANED IN ACCORDANCE WITH MANUFACTURERS INSTRUCTIONS.

PLANNING BOARD
TOWN OF BETHLEHEM
ALBANY COUNTY, NEW YORK

This Site Plan Approved.
Parker D. Mathusa

Title Chairman
SPA 60-A10

Date 4-4-07

D.F. GROUND SIGN 3/8"=1'-0" (1 SIGN REQUIRED)

BENDERSON
DEVELOPMENT
510 DELAWARE AVENUE, BUFFALO, NEW YORK, 14202
PROPERTY: GLENMONT PLAZA
GLENMONT, NEW YORK
PROP. # 4005 DRWG. # 4005GR
DATE 12.29.06 BY D.MAVIS
REVISION