


TEMPORARY EROSION AND SEDIMENT CONTROL NOTES

1. EROSION AND SEDIMENT CONTROL MEASURES SHALL BE IMPLEMENTED IN ACCORDANCE WITH THE LATEST EDITION OF NEW YORK STANDARDS AND SPECIFICATIONS FOR EROSION AND SEDIMENT CONTROL (aka: THE BLUE BOOK). EROSION CONTROL DEVICES SHALL BE INSTALLED PRIOR TO ANY CONSTRUCTION ACTIVITIES.
2. IT IS THE INTENT OF THESE PLANS AND NOTES TO BE USED AS A GUIDE BY THE CONTRACTOR TO ENSURE THAT NO ERODED MATERIAL MIGRATES FROM THE SITE OR ENTERS ANY WATER COURSE. IT IS THE CONTRACTOR'S RESPONSIBILITY TO ENSURE THAT THIS GOAL IS MET, BY IMPLEMENTING THESE PLANS AND ANY ADDITIONAL MEANS THAT MAY BE NECESSARY. FURTHER MEASURES MAY BE REQUIRED BY THE CITY, VILLAGE, OR TOWN ENGINEER. WHILE MANY OF THE EROSION CONTROL DETAILS CONTAINED WITHIN THESE PLANS ARE TAKEN DIRECTLY FROM THE BLUE BOOK, THE CONTRACTOR SHOULD CONSIDER ANY OF THE DETAILS CONTAINED IN SECTION 7A OF THE BLUE BOOK AS ACCEPTABLE PRACTICE IN THE APPROPRIATE APPLICATION.
3. THE DEVELOPER/CONTRACTOR OR HIS BUILDER SHALL INSPECT AND MAINTAIN EROSION CONTROL MEASURES WEEKLY AND AFTER EACH RAINFALL EVENT THROUGH THE ENTIRE DEVELOPMENT PROCESS. TO ASSURE PROPER FUNCTION, SILTATION BARRIERS SHALL BE MAINTAINED IN GOOD CONDITION AND REINFORCED, EXTENDED, REPAIRED, RE-SEED, AND PROTECTED FROM FURTHER EROSION. ALL SEDIMENT ACCUMULATED SHALL BE REMOVED AND CONTAINED IN APPROPRIATE SPOIL AREAS. WATER SHALL BE APPLIED TO NEWLY SEED, AREAS AS NEEDED UNTIL GRASS COVER IS WELL ESTABLISHED. DURING THESE PERIODIC INSPECTIONS, THE FOLLOWING ITEMS SHOULD BE PAID PARTICULAR ATTENTION:
  - A. THE BASIN INLET LOCATIONS SHALL BE INSPECTED FOR SILT ACCUMULATION CAUSED BY THE LACK OF ESTABLISHED SURROUNDING VEGETATION.
  - B. CATCH BASINS SHALL BE CHECKED FOR SEDIMENT ACCUMULATION.
  - C. RIP-RAP OUTLET PROTECTION SHALL ALSO BE CHECKED FOR SEDIMENT ACCUMULATION. IF SIGNIFICANT AMOUNTS OF SEDIMENT ACCUMULATE, RIP-RAP SHALL BE REMOVED AND REPLACED.
  - D. HAY/STRAW BALES AND SILT FENCING SHALL BE INSPECTED REGULARLY FOR UNDERMINING AND DETERIORATION.
  - E. SEED/MULCH AREAS SHALL BE INSPECTED REGULARLY TO SEE THAT A GOOD STAND IS MAINTAINED. AREAS SHALL BE REPAIRED AS NECESSARY.
4. EROSION CONTROL DEVICES SHALL NOT BE REMOVED UNTIL THE CITY, VILLAGE OR TOWN ENGINEER HAS APPROVED FINAL STABILIZATION.
5. HAY BALE CHECK DAMS AND SILT FENCE SHALL BE INSTALLED IN ACCORDANCE WITH PLAN AND DETAIL LOCATIONS AND AS DESCRIBED IN GP-0-08-001.
6. PRIOR TO CONSTRUCTION OF ANY PHASE, THE STABILIZED CONSTRUCTION ENTRANCES SHALL BE INSTALLED.
7. CONSTRUCTION TRAFFIC SHALL NOT CROSS STREAMS OR DITCHES EXCEPT AT SUITABLE CROSSING FACILITIES. EQUIPMENT SHALL NOT OPERATE, UNNECESSARILY, ON ADJACENT PAVED AREAS.
8. EXISTING PAVED AREAS SHALL BE CLEANED AT THE DIRECTION OF THE CITY, VILLAGE, OR TOWN ENGINEER.
9. WATER TRUCKS SHALL BE USED TO MINIMIZE DUST POLLUTION ON SITE, AND ON ADJACENT ROADWAYS ROADWAY AREAS AS DIRECTED BY THE CITY, VILLAGE, OR TOWN ENGINEER.
10. ANY WATER PUMPED AS A RESULT OF DEWATERING ACTIVITIES SHALL BE PUMPED INTO A DEWATERING PIT.
11. CONCRETE WASHOUT AREAS SHALL BE DESIGNATED BY THE DEVELOPER OR CONTRACTOR AND PROTECTED IN ACCORDANCE WITH GP-0-08-001.
12. ALL AREAS DISTURBED IN THE CONSTRUCTION PROCESS SHALL BE RE-SEED, AS SOON AS PRACTICABLE. PARTICULAR CARE SHALL BE TAKEN TO RE-SEED DISTURBED SLOPES IN A TIMELY MANNER.
13. IT IS RECOMMENDED THAT ALL EROSION CONTROL DEVICES BE PLACED FOR THE ENTIRE PHASE AS SHOWN ON THE EROSION CONTROL PLAN. PLACEMENT MAY BE DONE, HOWEVER, TO SUIT CONSTRUCTION SEQUENCING AS APPROVED BY THE CITY, VILLAGE, OR TOWN ENGINEER.
14. STOCK PILES SHALL BE PROTECTED BY HAY BALE BERMS PER GP-0-08-001. THESE BERMS SHALL BE MAINTAINED IN GOOD CONDITION UNTIL SAID STOCK PILES ARE REMOVED AND STOCK PILING AREAS ARE PERMANENTLY STABILIZED.
15. STOCK PILES SHALL BE SEED,ED UPON SUSPENSION OF WORK OR IF MATERIAL IS NOT TO BE USED WITHIN 14 DAYS, IN ACCORDANCE WITH GP-0-08-001.
16. IN NO CASE SHALL ERODIBLE MATERIALS BE STOCKPILED WITHIN 25 FEET OF ANY DITCH, STREAM OR OTHER SURFACE WATER BODY.
17. SILT FENCING SHALL BE INSTALLED AT THE DOWN GRADIENT PERIMETERS OF ALL SLOPES TO BE GRADED, PRIOR TO GRADING OPERATIONS.
18. SEDIMENT STILLING BASINS SHALL BE UTILIZED TO PREVENT OFF SITE EROSION.
19. THE STORMWATER DETENTION PONDS AND CUT-OFF SWALES SHALL BE COMPLETED PRIOR TO CONSTRUCTION OF ADJACENT AREAS.
20. WHERE NECESSARY, TEMPORARY GRADING WILL BE REQUIRED TO ROUTE STORMWATER TO CUT OFF SWALES AND DETENTION PONDS.
21. PRIOR TO ANY CONSTRUCTION ALL FEDERAL JURISDICTIONAL WETLANDS SHALL BE FIELD LOCATED AND DELINEATED WITH SILT FENCING. THE SILT FENCE SHALL BE LOCATED BETWEEN THE BUFFER AND THE JOB SITE.
22. CLEARING OPERATIONS SHALL BE LIMITED TO ACTIVE WORK AREAS.
23. CARE SHALL BE TAKEN TO PRESERVE AS MUCH EXISTING VEGETATION AS POSSIBLE AND HEALTHY TREES OF DESIRABLE SPECIES SHALL BE PROTECTED.
24. RIP-RAP OUTLET PROTECTION: RIP-RAP SHALL BE PROVIDED AT CULVERT LOCATIONS AS INDICATED ON THESE DRAWINGS. THE RIP-RAP SHALL PROTECT SIDE SLOPES FROM EROSION, AND SHALL BE ESTABLISHED AS THE CULVERT IS INSTALLED.
25. STONE CHECK DAMS SHALL BE PROVIDED AT ALL STORMWATER OUTLETS UNTIL VEGETATION HAS BEEN STABILIZED.
26. STORM INLET PROTECTION: IMMEDIATELY FOLLOWING COMPLETION OF ANY AND ALL OF THE PROPOSED STORM DRAIN INLETS, STORM DRAIN INLET PROTECTION SHALL BE CONSTRUCTED. THIS PROTECTION SHALL FUNCTION TO PREVENT SEDIMENT ENTRANCE INTO THE STORM DRAINS. PROTECTION SHALL BE MAINTAINED IN GOOD CONDITION UNTIL THE DRAINAGE AREAS HAVE BEEN PERMANENTLY STABILIZED.
26. B. RECP (ROLLED EROSION CONTROL PRODUCT) SHALL BE JUTE OR EXCELSDOR MATTING, PROVIDE 4" MIN TOPSOIL AND SEED WITH KENTUCKY BLUEGRASS, CREEPING RED FESCUE AND PERENNIAL RYGRASS AT A RATE OF 25, 20 AND 10 LBS PER ACRE RESPECTIVELY.

EROSION AND SEDIMENT CONTROL NOTES

1. THIS PROJECT IS AUTHORIZED UNDER NYSDEC PERMIT GP-0-08-001.
2. ANY CONTRACTOR INVOLVED IN EARTHWORK ACTIVITIES, INCLUDING BUT NOT LIMITED TO: CLEARING, GRADING AND TRENCHING, SHALL REVIEW ALL PERMIT CONDITIONS AND CERTIFY UNDERSTANDING OF THESE CONDITIONS, IN WRITING. IT IS THE CONTRACTOR'S RESPONSIBILITY TO IMPLEMENT ALL EROSION CONTROLS DESCRIBED IN GP-0-08-001, AND IT IS NOT THE INTENT OF THESE DRAWINGS TO REPLACE OR DISSEMINATE THE PERMIT REQUIREMENTS. THE CONTRACTOR SHALL REMAIN IN COMPLIANCE WITH THE PERMIT AT ALL TIMES.
3. AT NO TIME, SHALL MORE THAN FIVE (5) ACRES REMAIN UNSTABILIZED. THE CONTRACTOR SHALL COORDINATE EARTHWORK ACTIVITIES AND IMPLEMENTATION OF SOIL STABILIZATION MEASURES TO ENSURE COMPLIANCE TO THIS PERMIT REQUIREMENT.
4. THE CONTRACTOR SHALL MAINTAIN A CLEAN CONSTRUCTION AND EQUIPMENT ENTRANCE WHENEVER PRACTICABLE.
5. DISTURBED AREAS SHALL BE STABILIZED WITHIN 14 DAYS OF COMPLETION OR SUSPENSION OF GRADING OPERATIONS.
6. INSTALL TEMPORARY & PERMANENT SEEDING IN ACCORDANCE WITH THE NEW YORK GUIDELINES FOR URBAN EROSION AND SEDIMENT CONTROL STANDARD AND SPECIFICATION FOR CRITICAL AREA SEEDING PAGE 3.3 AND FOR MULCHING PAGE 3.31.
7. INSTALL PERMANENT RIP-RAP AT ALL PIPE END SECTIONS AT TIME OF INSTALLATION OF PIPE.
8. IMPROVEMENTS SHOWN ARE FOR REFERENCE ONLY SEE OTHER SHEETS FOR SITE UTILITY AND GRADING.
9. PAVED AREAS ARE TO BE SWEEP DAILY TO REMOVE ANY SEDIMENT AND ALL NEWLY PAVED AREAS SHALL BE DIRECTED TO THE TEMPORARY OR FINAL SEDIMENT CONTROL BASINS.

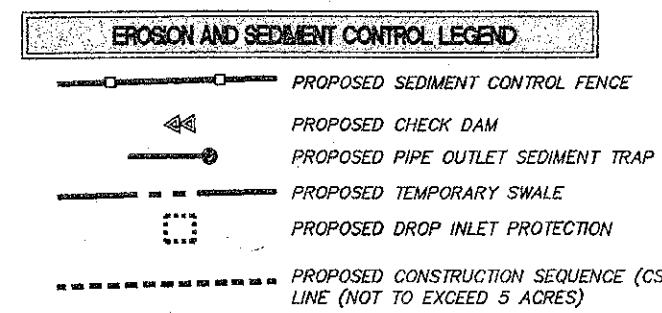

TEMPORARY SWALE SUMMARY TABLE				
SWALE	LENGTH	GRADE	TYPE*	DRAINAGE AREA
S1	1700'	1%	A, 1	10 ACRES
S2	200'	2%	A, 1	1.2 ACRES
S3	500'	0.5%	A, 1	3.2 ACRES
S4	230'	1.7%	A, 1	0.5 ACRES
S5	770'	1.0%	A, 1	1.6 ACRES


\* ALL TEMPORARY SWALES SHALL RECEIVE RECP

CONSTRUCTION SEQUENCE SUMMARY TABLE	
CS#	DISTURBED AREA
CS1	4.02 ACRES
CS2	3.30 ACRES
CS3	5.00 ACRES
CS4	4.38 ACRES
CS5	3.27 ACRES
CS6	3.47 ACRES
CS7	2.03 ACRES
CS8	2.06 ACRES
CS9	1.03 ACRES
CS10	4.09 ACRES

TEMPORARY SEDIMENT TRAP SUMMARY TABLE						
DESCRIPTION	TRAP No.1	TRAP No.2	TRAP No.3	TRAP No.4	TRAP No.5	TRAP No.6
TYPE	12 ACRES	12 ACRES	3.6 ACRES	1.2 ACRES	4.6 ACRES	1.2 ACRES
DRAINAGE AREA	1608 C.Y.	1608 C.Y.	383 C.Y.	161 C.Y.	617 C.Y.	161 C.Y.
STORAGE REQ'D	2100 C.Y.	2100 C.Y.	800 C.Y.	800 C.Y.	700 C.Y.	200 C.Y.
STORAGE PROVIDED*	2100 C.Y.	2100 C.Y.	800 C.Y.	800 C.Y.	700 C.Y.	200 C.Y.
PIPE OUTLET	24"	18"	6"	6"	18"	6"
DEPTH BELOW OUTLET	12"	12"	12"	12"	12"	12"
EMBANKMENT HT.	6"	6"	6"	6"	6"	6"
50% CLEANOUT ELEVATION	192.0	212.0	216.0	216.0	199.0	207.0
INVERT OUT ELEVATION	190.0	210.0	214.0	214.0	197.0	205.0
LENGTH x WIDTH x HT*	150'x75'x5'	150'x75'x5'	90'x50'x4.8'	90'x50'x4.8'	90'x45'x4.7'	50'x25'x4.3'

\*STORAGE CAPACITY FROM THE TOP ELEVATION OF THE RISER PIPE OUTLET TO THE TRAP BOTTOM


ALBANY COUNTY DEPARTMENT OF HEALTH  
VISION OF ENVIRONMENTAL HEALTH SERVICES  
By direction of the Commissioner of Health, these plans are hereby approved. See first sheet for date and signature.

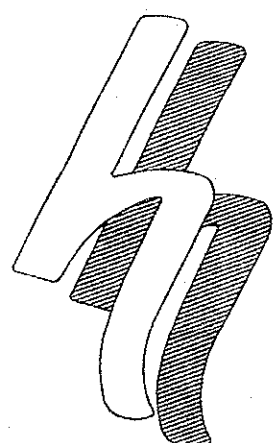

**HERSHBERG & HERSHBERG**  
Consulting Engineers and Land Surveyors

18 Locust Street  
Albany, New York 12203

ALTERATION OF THIS DOCUMENT EXCEPT BY A LICENSED PROFESSIONAL ENGINEER OR LAND SURVEYOR, IS ILLEGAL.



REMARKS	DATE
TOWN COMMENTS SUBMISSION	3/20/09
TOWN COMMENTS RE-SUBMISSION	6/16/09
TOWN COMMENTS RE-SUBMISSION	8/19/09
TOWN COMMENTS RE-SUBMISSION	2/16/10
TOWN COMMENTS RE-SUBMISSION	5/15/10
SWA TOWN COMMENTS	10/6/10

REVISIONS

PROPOSED EROSION & SEDIMENT CONTROL DETAILS & GENERAL PLAN - PHASE 1A  
VISTA TECHNOLOGY CAMPUS  
TOWN OF BETHLEHEM  
ALBANY COUNTY, STATE OF NEW YORK  
PLANNING BOARD  
TOWN OF BETHLEHEM  
ALBANY COUNTY, NEW YORK  
This Site Plan Approved:  
*George J. Finner*  
Title: CHAIRMAN  
Date: 8/22/2011 SP11169  
AUG 12 2011  
Town of Bethlehem Planning Board

C12