


WESTERN AVENUE


GREENWOOD LANE

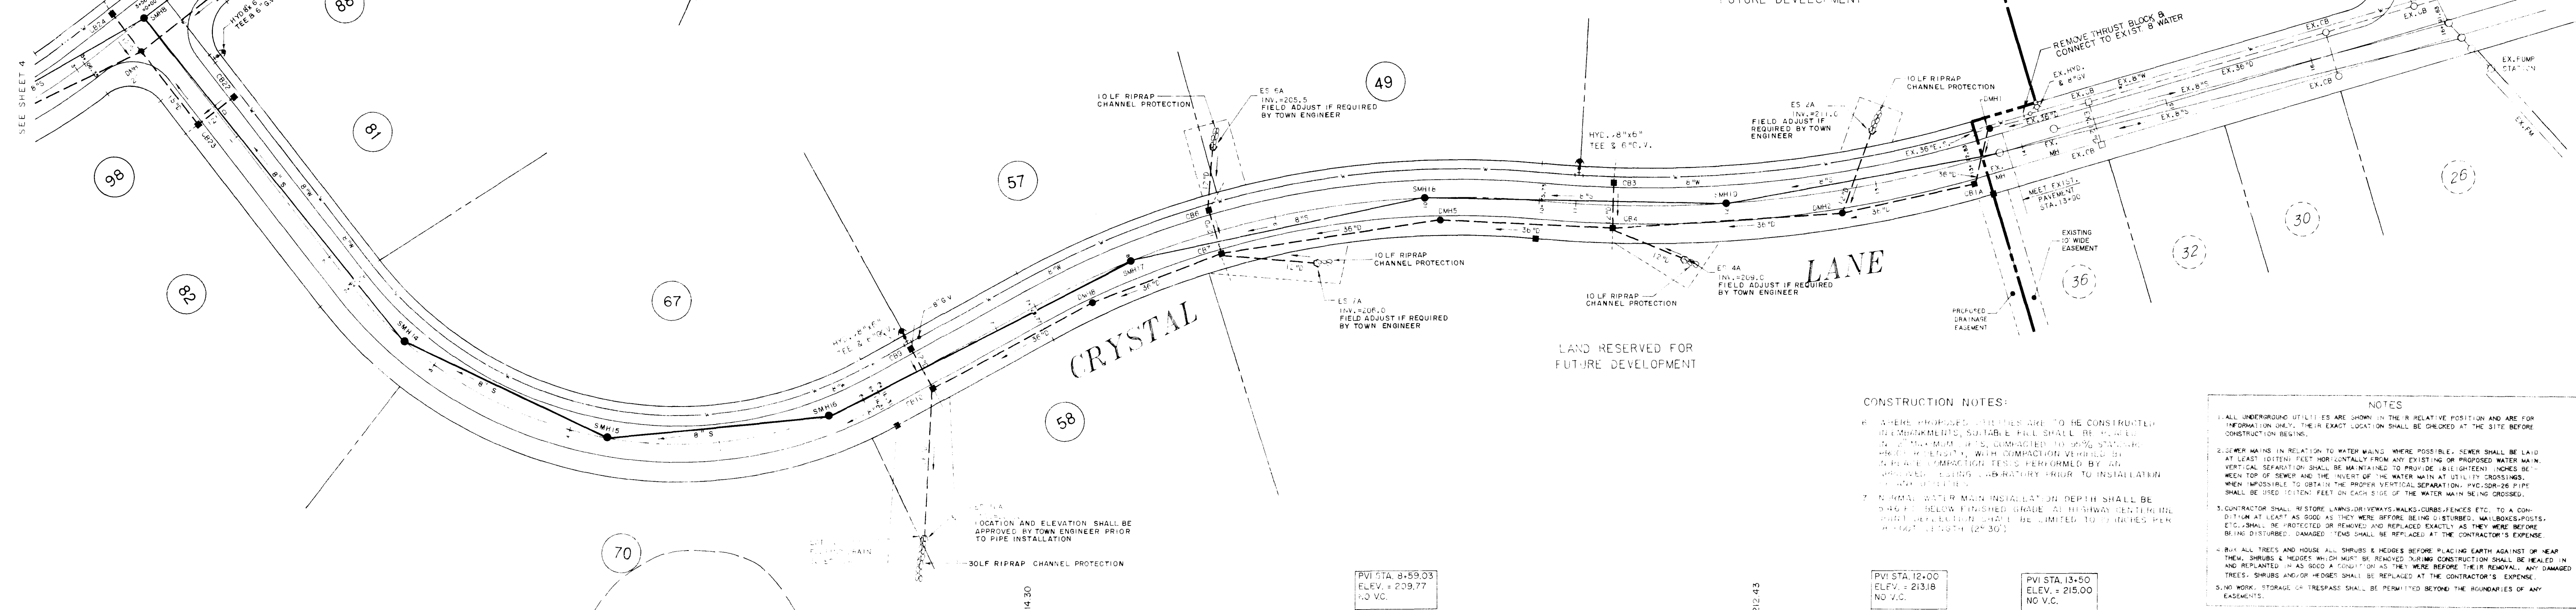

CONSTRUCTION NOTES:

- WHERE PROPOSED SEWER LINES ARE TO BE CONSTRUCTED, THE EXISTING GROUND SURFACE SHALL BE MAINTAINED TO THE MAXIMUM EXTENT POSSIBLE. WHERE NECESSARY, THE GROUND SURFACE SHALL BE RECONSTRUCTED TO MATCH THE EXISTING GROUND SURFACE.
- NORMAL WATER MAIN INSTALLATION DEPTH SHALL BE 4'-6" BELOW FINISHED GRADE AT HIGHWAY CENTERLINE. DEPTH SHALL BE LIMITED TO 10 FEET PER 100 FEET OF LENGTH.

- NOTES:
- ALL UNDERGROUND UTILITIES ARE SHOWN IN THE PLAN. THEIR EXACT LOCATION SHALL BE CHECKED AT THE SITE BEFORE CONSTRUCTION BEGINS.
 - SEWER MAINS IN RELATION TO WATER MAINS: WHERE POSSIBLE, SEWER SHALL BE LAID AT LEAST 10 FEET HORIZONTALLY FROM ANY EXISTING OR PROPOSED WATER MAIN. VERTICAL SEPARATION SHALL BE MAINTAINED TO PROVIDE A MINIMUM OF 18 INCHES BETWEEN TOP OF SEWER AND THE INVERT OF THE WATER MAIN AT UTILITY CROSSINGS. WHEN IMPOSSIBLE TO OBTAIN THE PROPER VERTICAL SEPARATION, THE 18 INCH PIPE SHALL BE USED (10 FEET ON EACH SIDE OF THE WATER MAIN BEING CROSSED).
 - CONTRACTOR SHALL RESTORE LUMBS, DRIVEWAYS, WALKS, CURBS, FENCES, ETC., TO A CONDITION AT LEAST AS GOOD AS THEY WERE BEFORE BEING DISTURBED. MAILBOXES, POSTS, ETC., SHALL BE PROTECTED OR REMOVED AND REPLACED EXACTLY AS THEY WERE BEFORE BEING DISTURBED. DAMAGED ITEMS SHALL BE REPLACED AT THE CONTRACTOR'S EXPENSE.
 - ALL TREES AND HOUSES, ALL SHRUBS & BUSHES BEFORE PLACING EARTH AGAINST OR NEAR THEM. SHRUBS & BUSHES WHICH MUST BE REMOVED DURING CONSTRUCTION SHALL BE REPAIRED AND REPLANTED IN AS GOOD A CONDITION AS THEY WERE BEFORE THEIR REMOVAL. ANY DAMAGED TREES, SHRUBS AND/OR BUSHES SHALL BE REPLACED AT THE CONTRACTOR'S EXPENSE.
 - NO WORK, STORAGE OR TRAFFIC SHALL BE PERMITTED BEYOND THE BOUNDARIES OF ANY EASEMENTS.

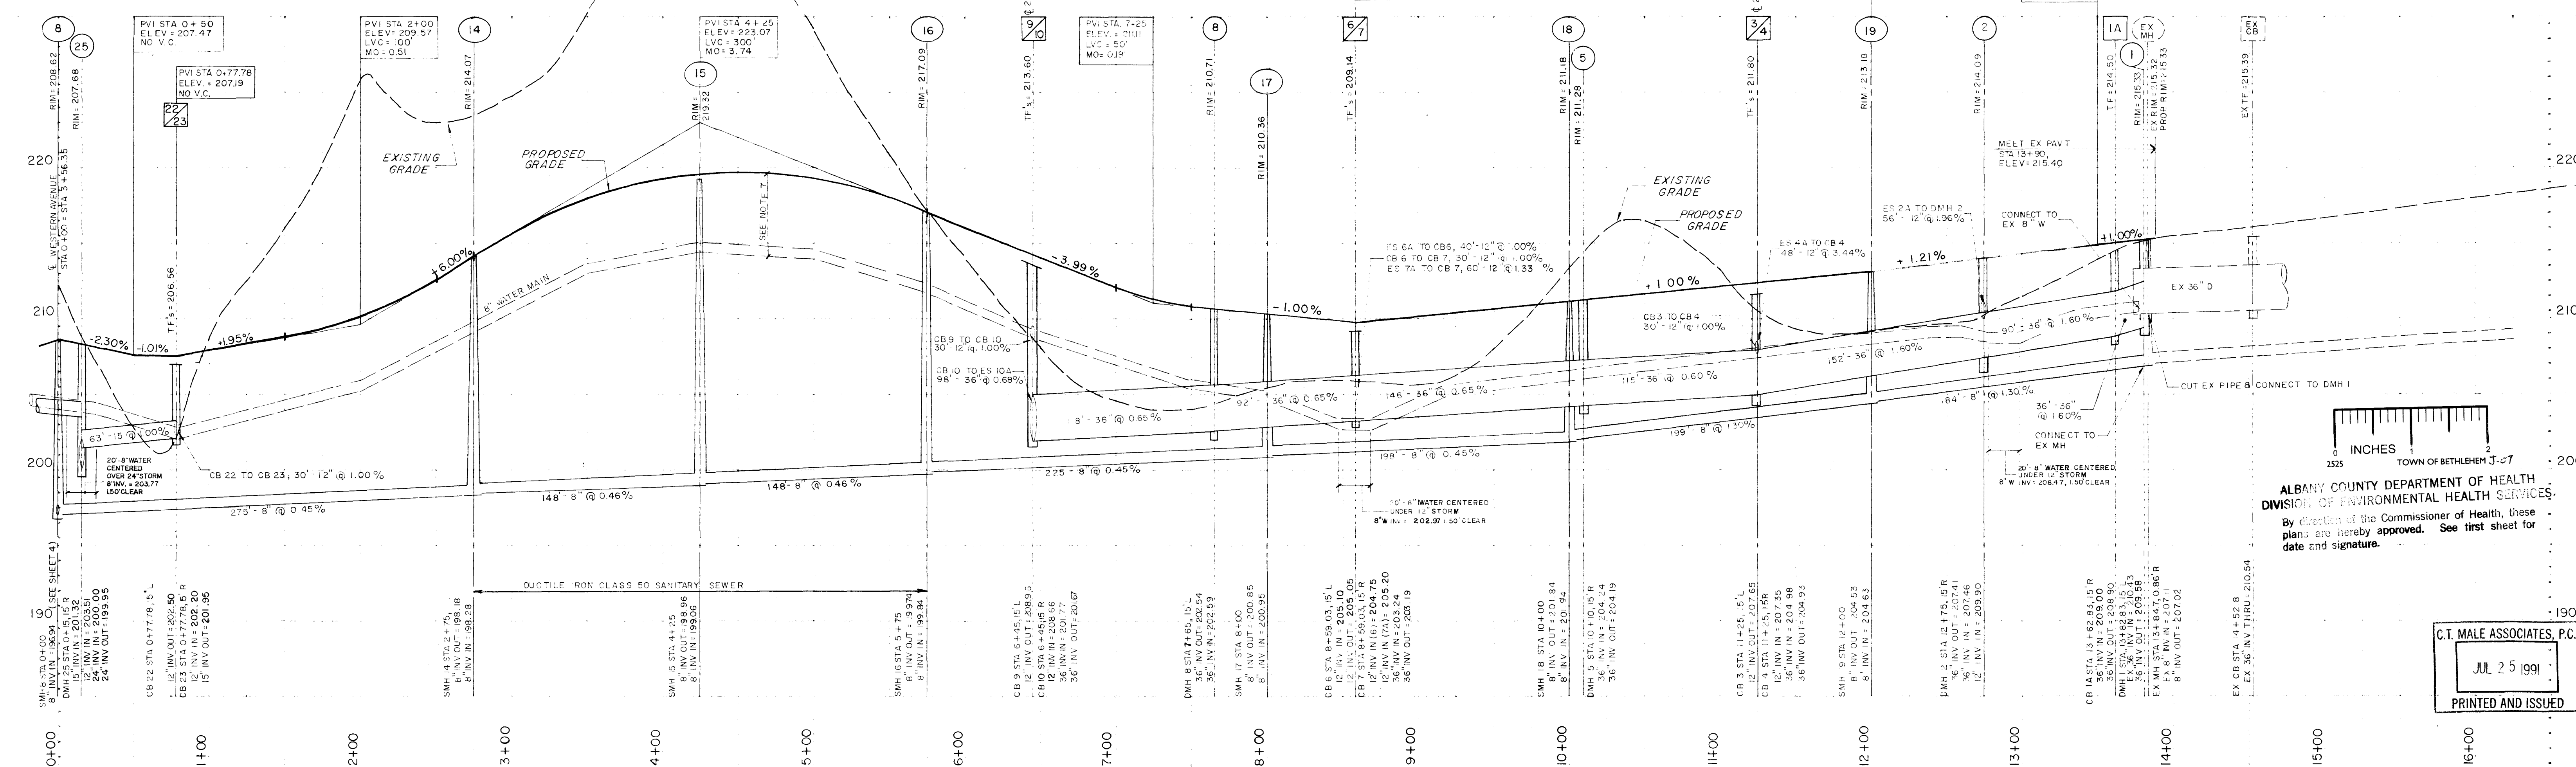

ALBANY COUNTY DEPARTMENT OF HEALTH
DIVISION OF ENVIRONMENTAL HEALTH SERVICES
By direction of the Commissioner of Health, these
plans are hereby approved. See first sheet for
date and signature.

C.T. MALE ASSOCIATES, P.C.
JUL 25 1991
PRINTED AND ISSUED

DATE	RECORD OF WORK	Drawn	Check	Appr	DATE	RECORD OF WORK	Drawn	Check	Appr	DESIGNER:	TOWN OF BETHLEHEM
7/1/91	ADDED LOT NO. 98 AND 10' EASEMENT	GLP	GEH	GEH						CHECKER:	COUNTY OF ALBANY
										DRAFTER: PN	REVIEWER:
										APPROVED BY:	DATE: MARCH 3, 1989
											SCALE: HOR. 1 inch = 50 feet; VERT. 1 inch = 5 feet

PLAN/PROFILE
DEVONSHIRE HILLS
CRYSTAL LANE
STA 0+00 TO STA 13+90

GARY E. HOFFMAN
PE 64079

C.T. MALE ASSOCIATES, P.C.
50 Century Hill Drive, P.O. Box 727, Latham, NY 12110
(518) 785-0976
Engineering Surveying Architecture Landscape Architecture
Laboratory Services Computer Services

© 1991
C.T. MALE ASSOCIATES, P.C.

PROJECT NO. 88.1743 SHEET 6 OF 11 DWG. NO. 89-128