
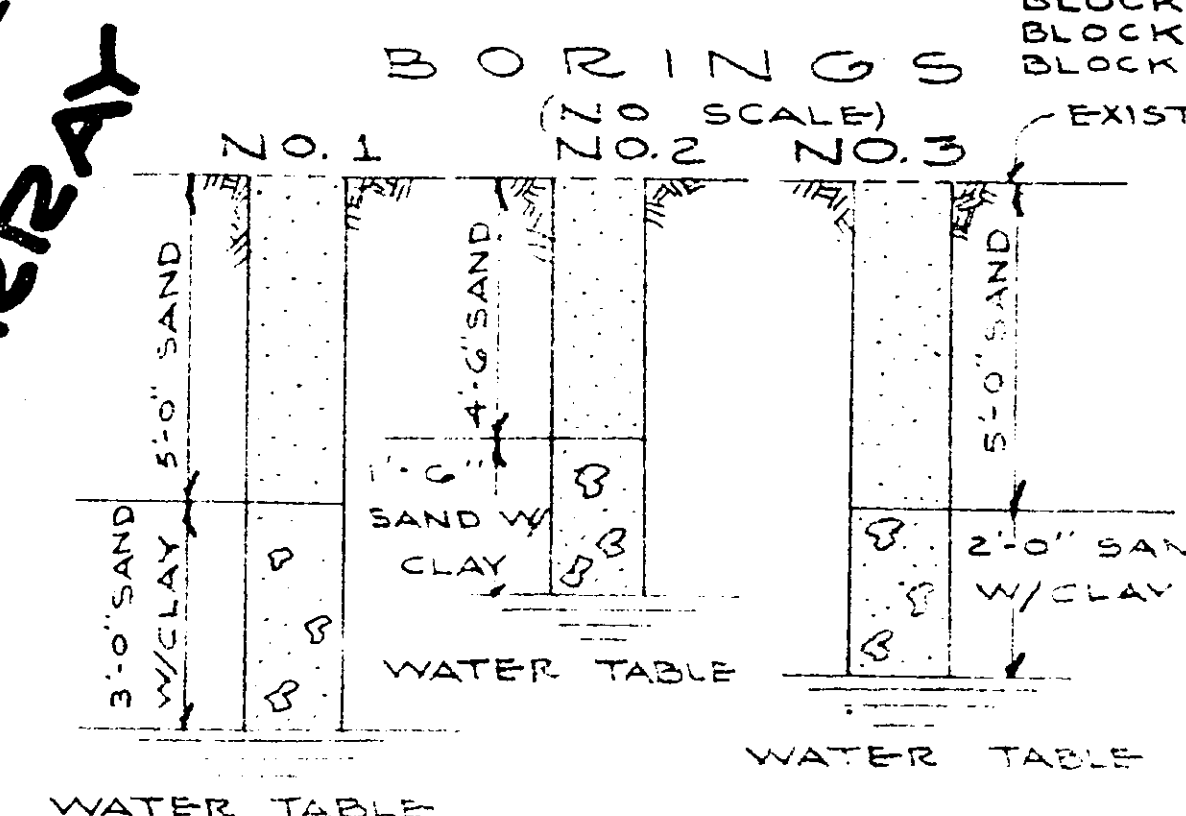
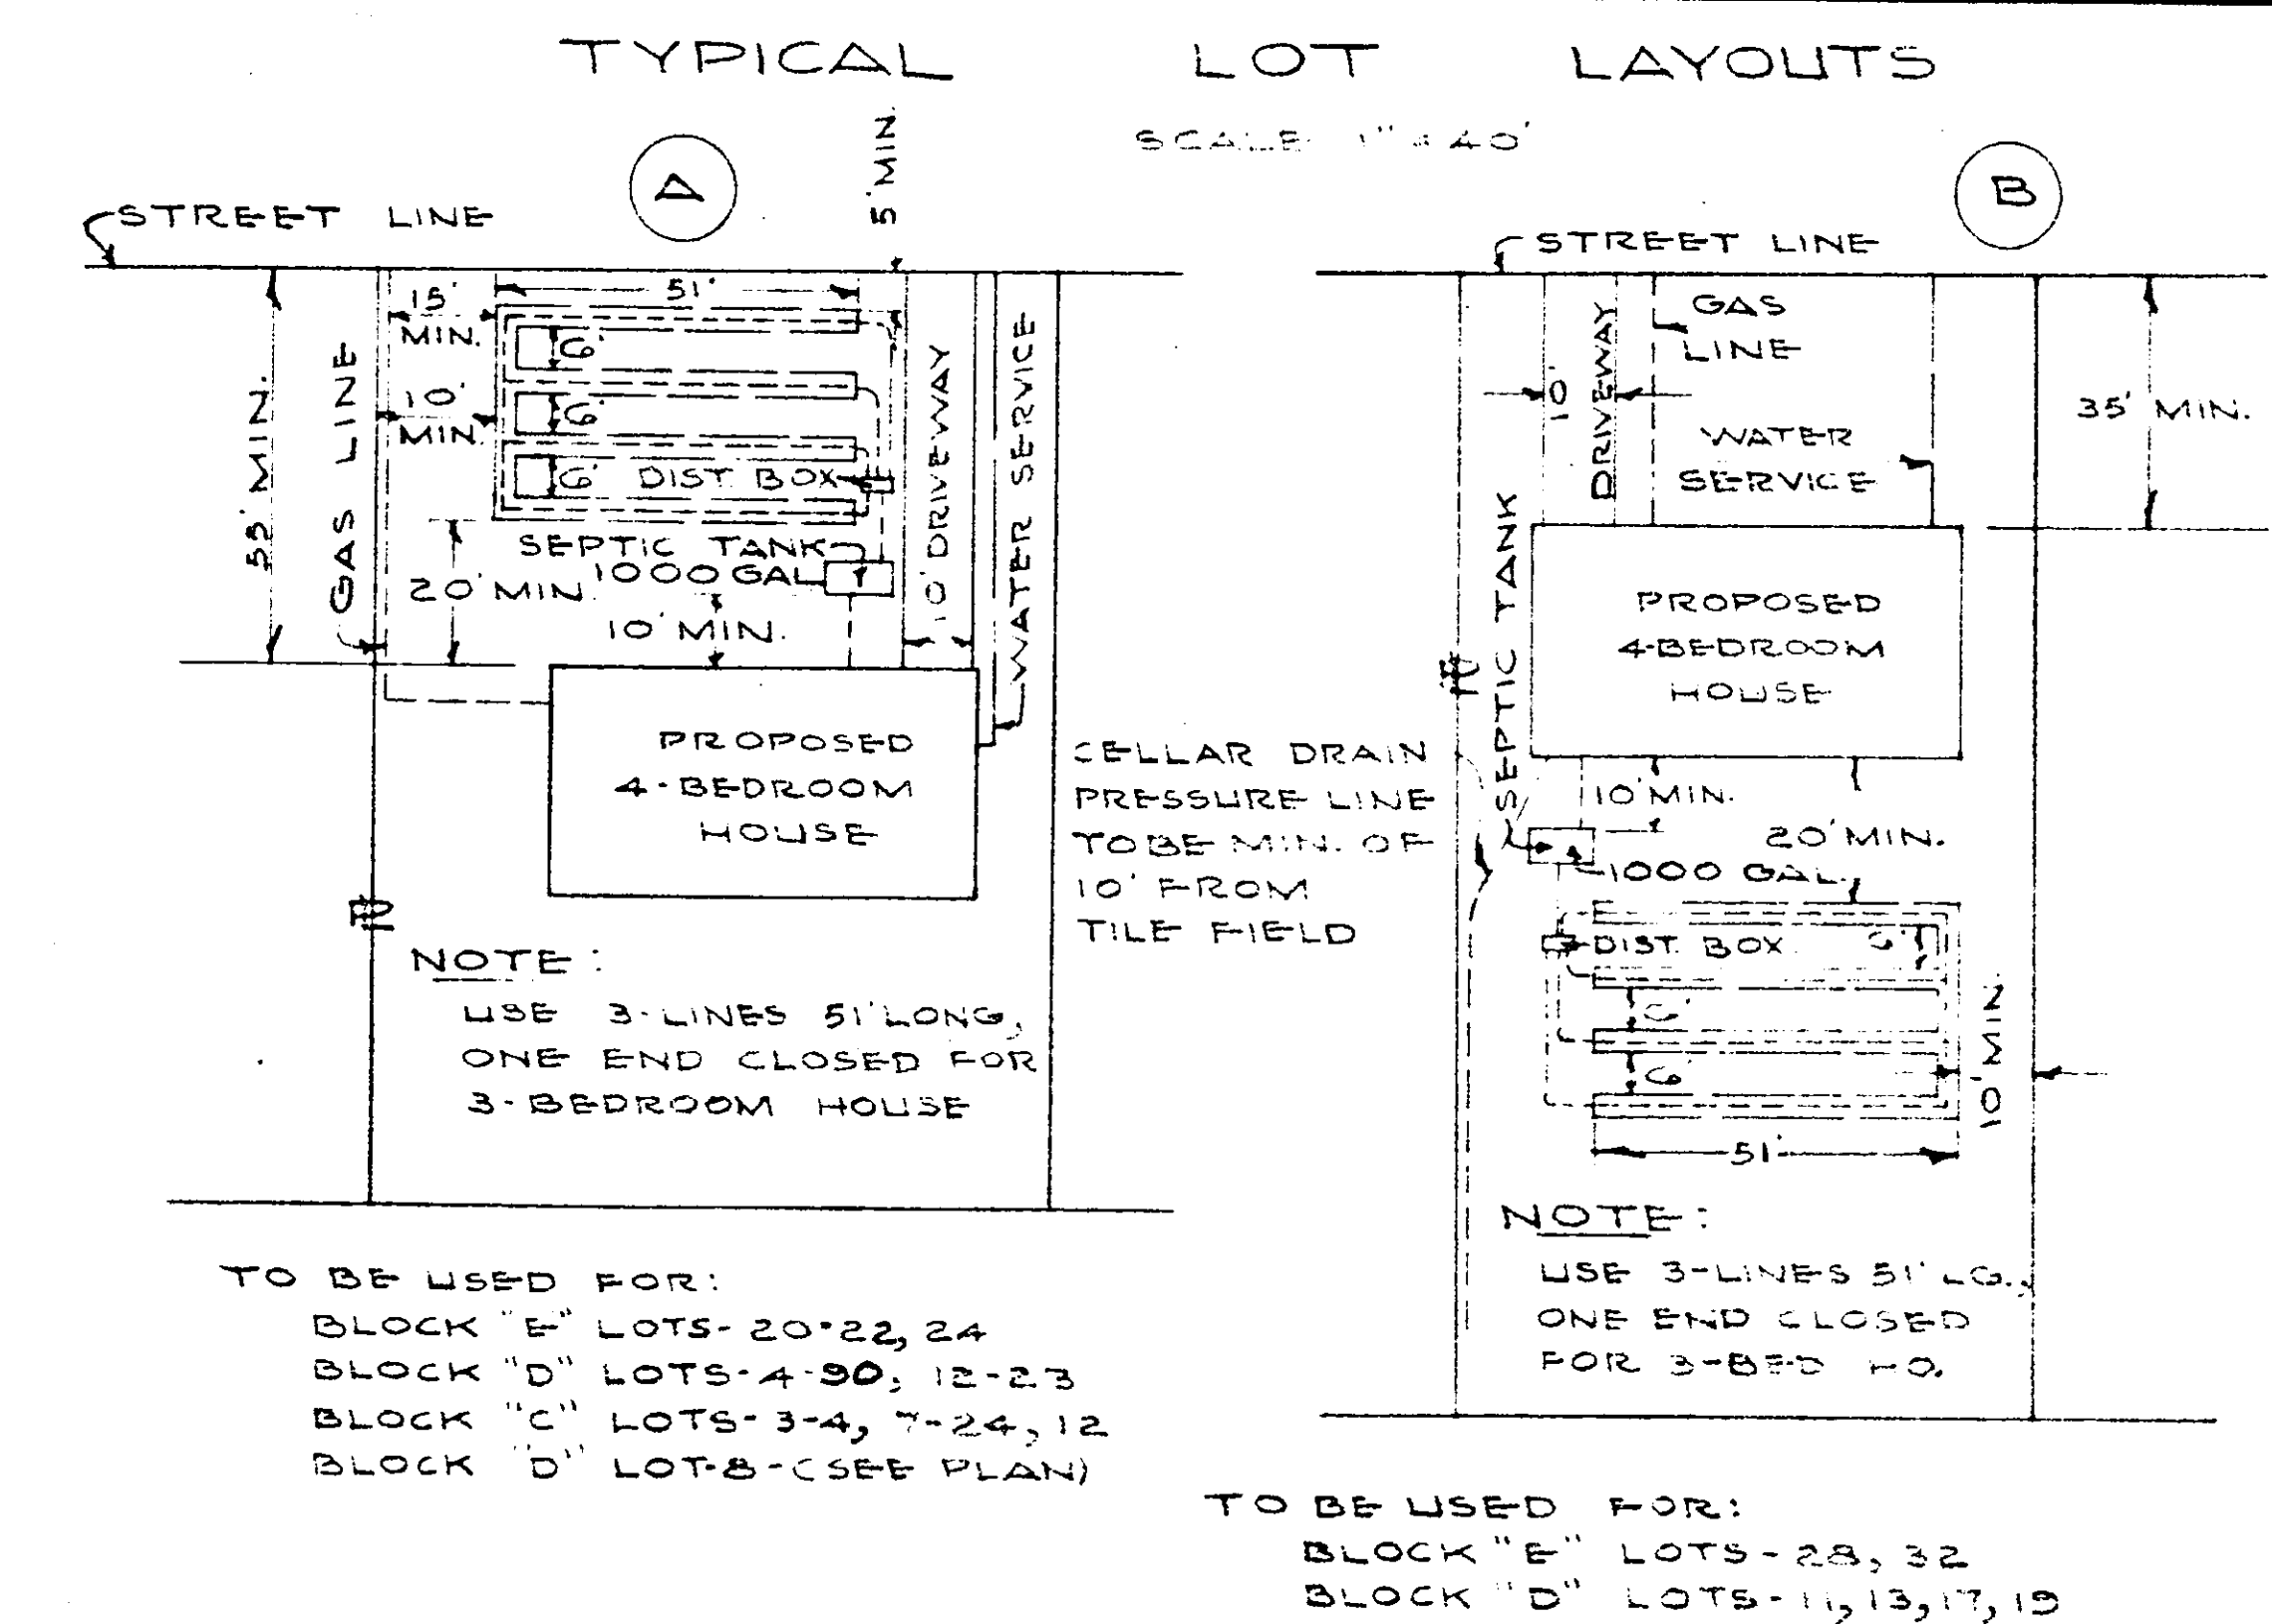


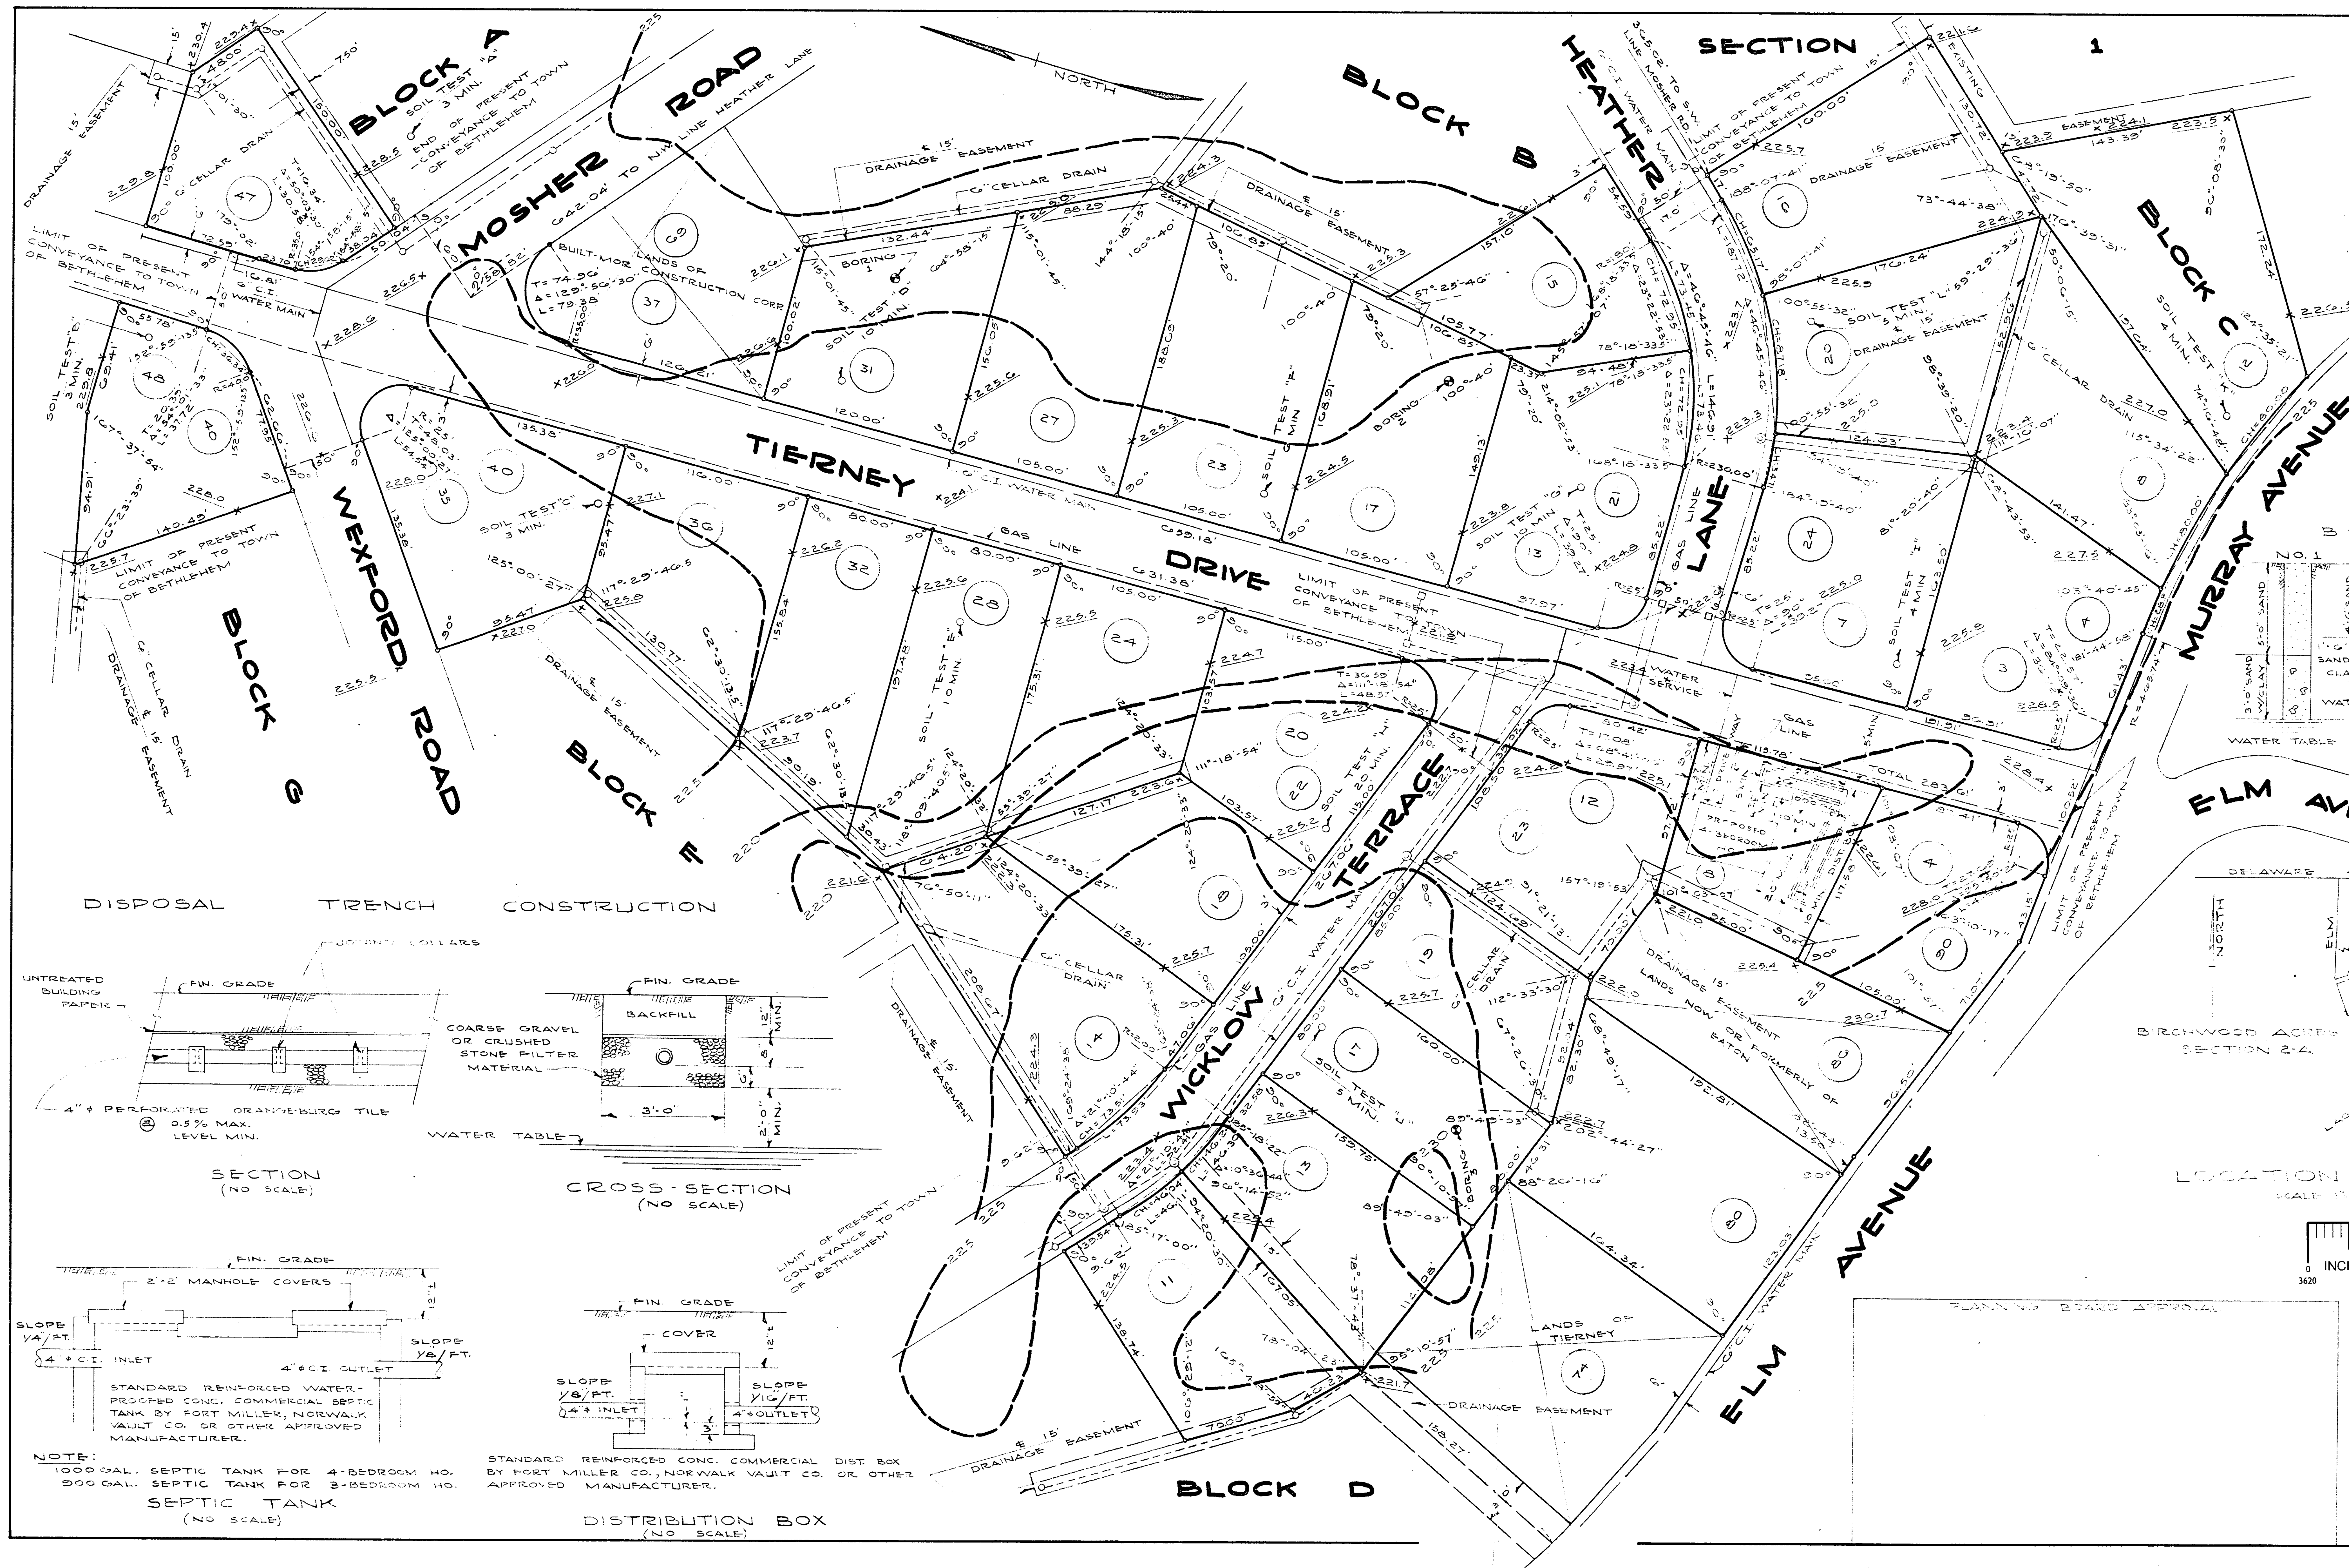

- GENERAL NOTES**
- DESIGN OF SEPTIC TANKS AND TILE FIELD BASED ON FOUR BEDROOMS AND 10 MINUTE PERCOLATION TEST. SEPTIC TANK CAPACITY 1000 GAL. SEWER LINES FROM HOUSE TO SEPTIC TANK TO BE 4" CAST IRON PIPE W/LEAD CALKED JOINTS. TANK TO BE 4' DIA. TO BE SLOD ORANGEBURG, DIST. BOX TO DISPOSAL FIELD TO BE SLOD ORANGEBURG, AND THE DISPOSAL FIELD TO BE PERFORATED TILE.
  - LOT NUMBERS SHOWN TO BE USED FOR HOUSE NO'S.
  - PLUMBING FOR LOTS WITH SEPTIC TANKS IN REAR MUST BE CONSTRUCTED TO FACILITATE CONNECTION TO FUTURE SAN. SEWER IN STREET.
  - BENCH MARK: TOP OF NUT AT POINT OF ARROW ON HYDRANT AT INTERSECTION OF MOSHERS AND LAORANGE - ELEV. 223.22' PROPOSED - ELEV. 223.23'.
  - LOT DIMENSIONS FROM MAP OF PROPERTY OF EDWARD D. TIERNEY DATED FEB. 23, 1956 AND MADE BY HARRY C. KELLY, P.E.
  - LOT (X) NOT INCLUDED IN THIS APPROVAL.

**COUNTY HEALTH APPROVAL**

**ALBANY COUNTY DEPARTMENT OF HEALTH**

This is to certify that the proposed arrangements for water supply and sewerage for Birchwood Acres, Sect. 2A, T. 12N. R. 11E. S. 24 are approved subject to the conditions listed in letter of this date, and in accordance with Article X of the Albany County Sanitary Code. Consent is hereby given for the filing of this map in the Office of the Albany County Clerk.

Date Jan 11, 1963 Harry C. Kelly Commissioner of Health

By John W. Kelly Dir. Div. Environmental Health Services

**MAP OF BIRCHWOOD ACRES**

**SECTION 2A**

**PROPERTY OF BETHLEHEM DEVELOPERS INCORPORATED**

**DELMAR**

**ALBANY CO. SCALE 1"=50'**

**NEW YORK DEC. 4, 1962**

**PLANNING BOARD APPROVAL**

**EDWARD D. TIERNEY AND SON**

**CIVIL ENGINEERS AND SURVEYORS**

**DELMAR, NEW YORK**