




REVISIONS		
NO.	DATE	DESCRIPTION
1	11/8/85	REVISED PER TOWN RECORD
2	1/2/86	STORM SEWER ADJUSTED
3	2/5/86	GENERAL REVISIONS
4	3/12/86	REVISED PER TOWN RECORD
5	4/14/86	REVISED PER TOWN RECORD
6	9/26/86	SA REVISED ON PATERSON & TICE
7	11/3/86	IS 31 and MH 31A ADDED TO TICE LANE
8	3/23/87	REVISED IS 31 and MH 31A ADDED TO TICE LANE
9	7/16/87	REVISED EASEMENTS

- NOTES**
- 1- BENCHMARK: TOP OF NUT AT POINT OF ARROW ON HYDRANT AT INTERSECTION OF FEURA BUSH ROAD AND MURRAY DRIVE EL. 165.28 USGS DATUM (TOWN OF BETHLEHEM)
 - 2- PROPOSED FINISHED GRADES SHOWN THUS: 171.32
 - 3- SANITARY SEWER: 8" ARMO TRUSS PIPE AT 0.004 SLOPE UNLESS OTHERWISE SHOWN
 - 4- ALL STREET CROSSINGS 30.00'-12" CMP ON 1.00% GRADE UNLESS OTHERWISE SHOWN
 - 5- ALL CORRUGATED METAL PIPE SHOWN FULLY COATED WITH PAVED INVERT. REQUIRED GAUGES AS FOLLOWS:
6" - 18 GAUGE
12" - 24" - 16 GAUGE
30" - 36" - 14 GAUGE
 - 6- FOR MANHOLE DETAILS AND PIPE INSTALLATION SEE CONSTRUCTION DETAILS
 - 7- ALL STRUCTURES CONTAINING PIPES GREATER THAN 24" DIAMETER MUST BE AT LEAST 5'-0" I.D.
 - 8- WATER SERVICES SHOULD PASS UNDER STORM SEWER WHERE NECESSARY TO PROVIDE AT LEAST 5'-0" OF COVER
 - 9- LOTS 7 THRU 34 HENDERSON ROAD AND LOTS II THRU 33 MURRAY DRIVE COMPRISE SECTION NO. 1
 - 10- LOTS 7 THRU 30 PATERSON DRIVE AND LOTS 3 THRU 16 TICE LANE COMPRISE SECTION 2
 - 11- ALL WATER MAINS TO BE 8" DUCTILE IRON PIPE

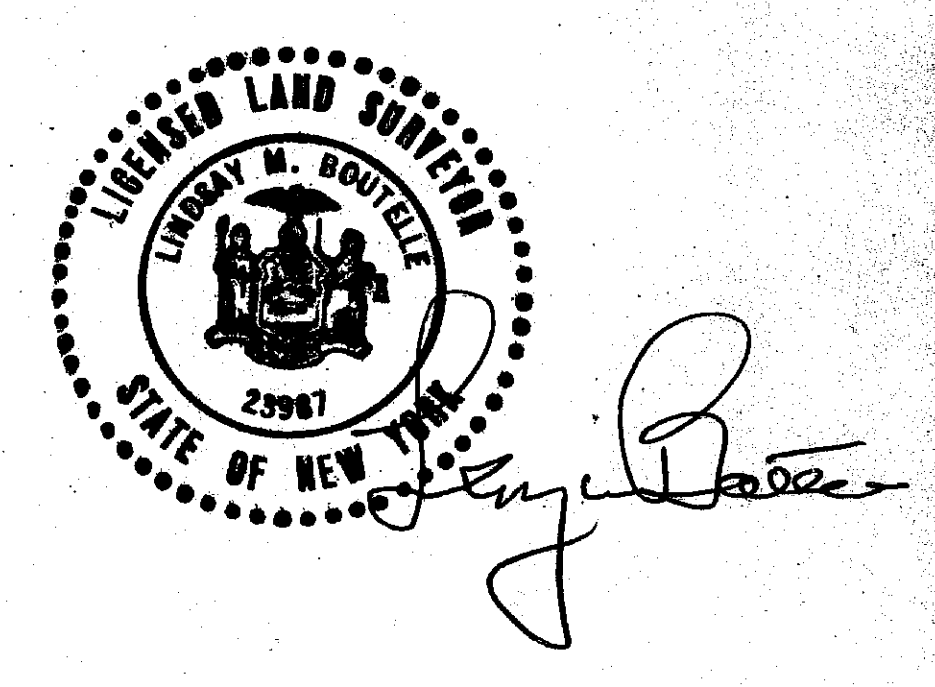

DRAINAGE PLAN
"WOODHILL"
SECTION NO. 1 & 2
PROPERTY OF
VINCENT RIEMMA
TOWN OF BETHLEHEM

TOWN: BETHLEHEM	COUNTY: ALBANY
STATE: NEW YORK	DATE: MARCH 11, 1985
SCALE: 1" = 50'	REVISION NO: 7,8

Map Prepared by
EDWARD W. BOUTELLE & SON
Civil Engineers & Surveyors
Delmar, New York

SHEET FILE
OF NO:

ALBANY COUNTY DEPARTMENT OF HEALTH
DIVISION OF ENVIRONMENTAL HEALTH SERVICES.
By direction of the Commissioner of Health, these
plans are hereby approved. See first sheet for
date and signature.

