
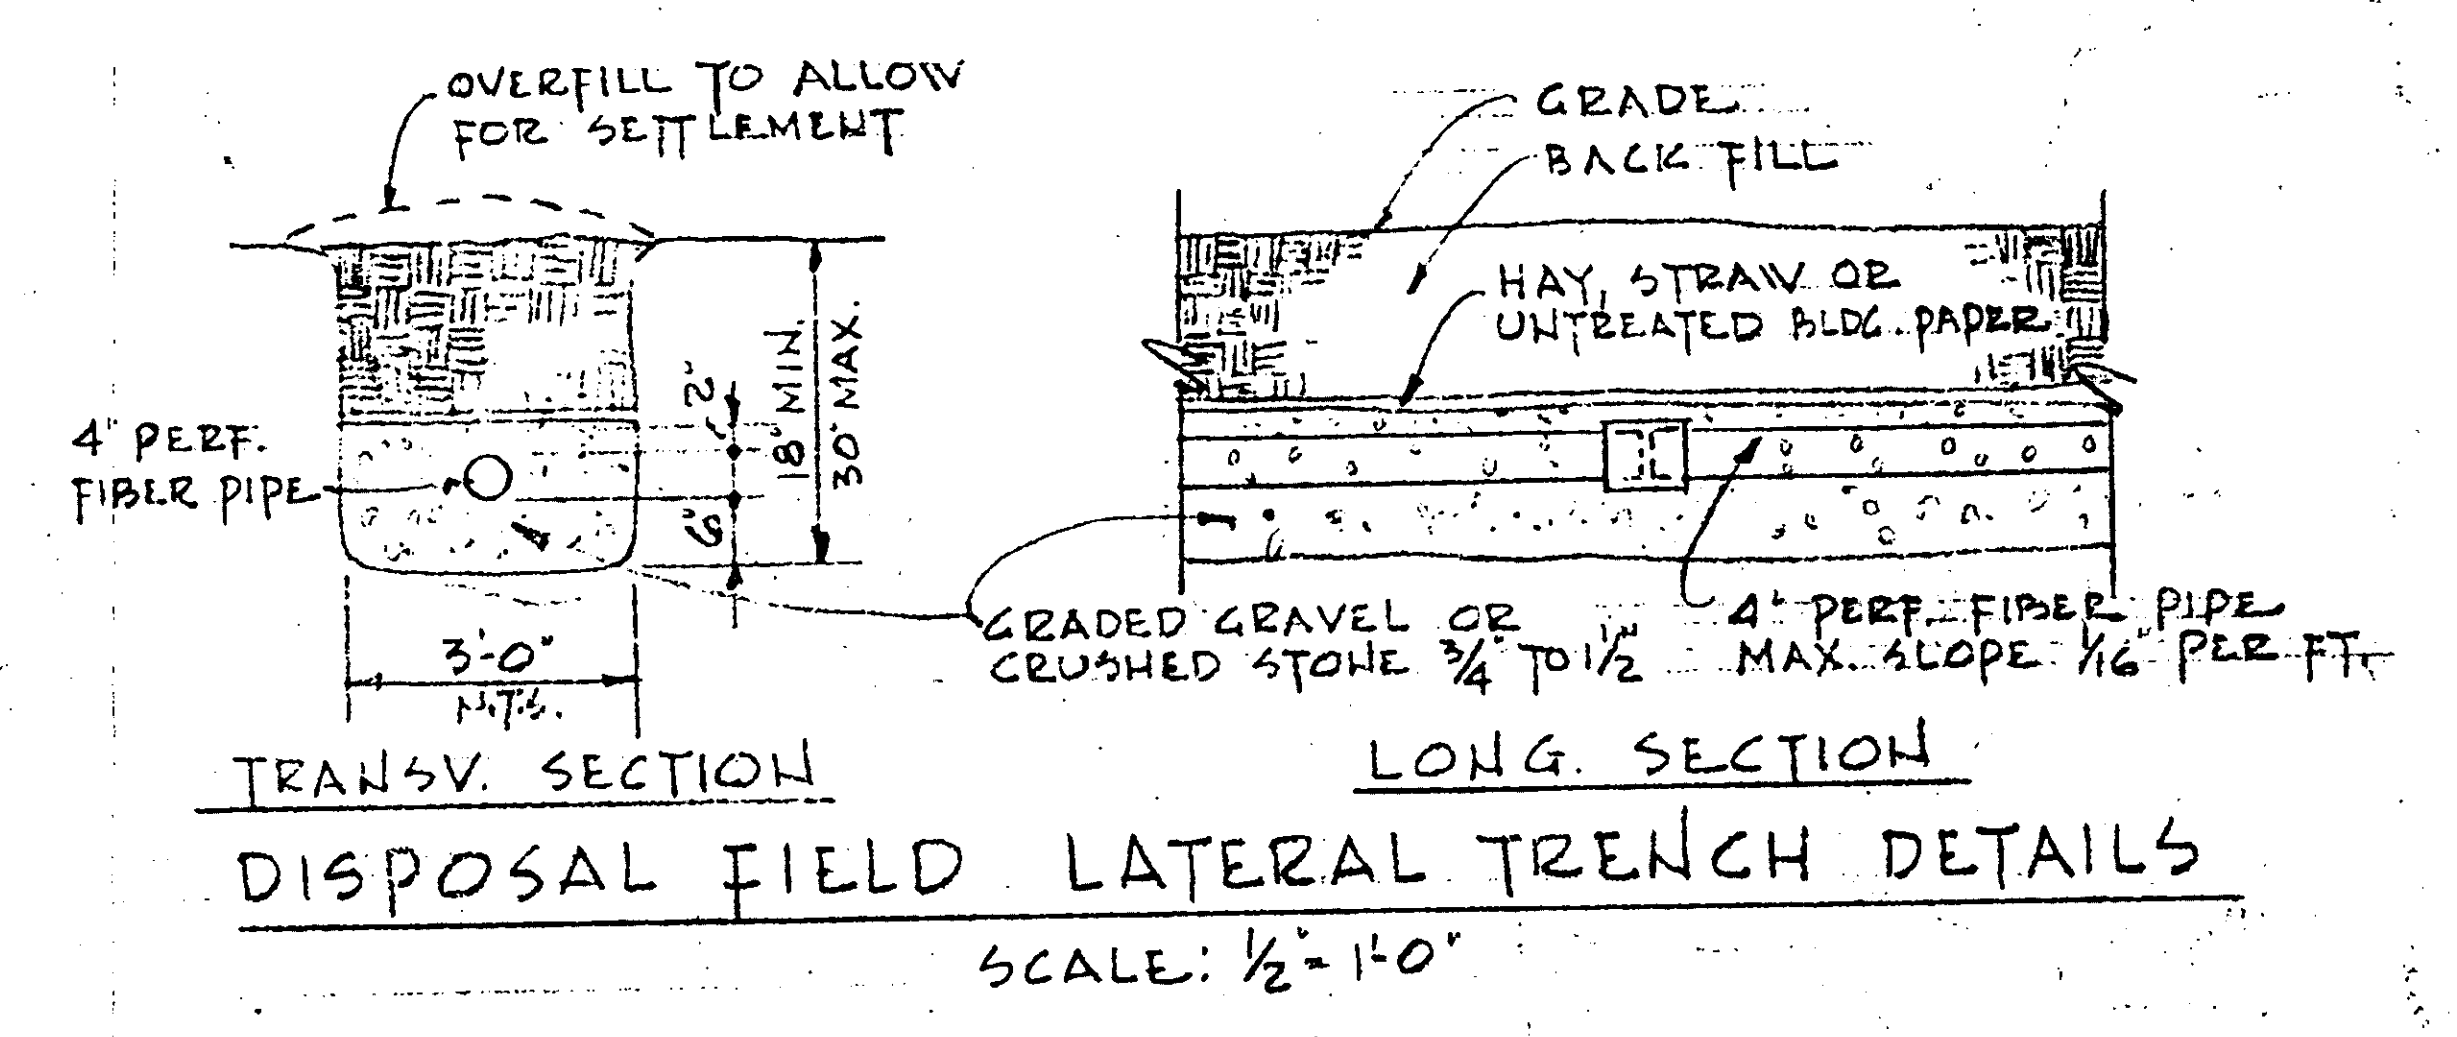
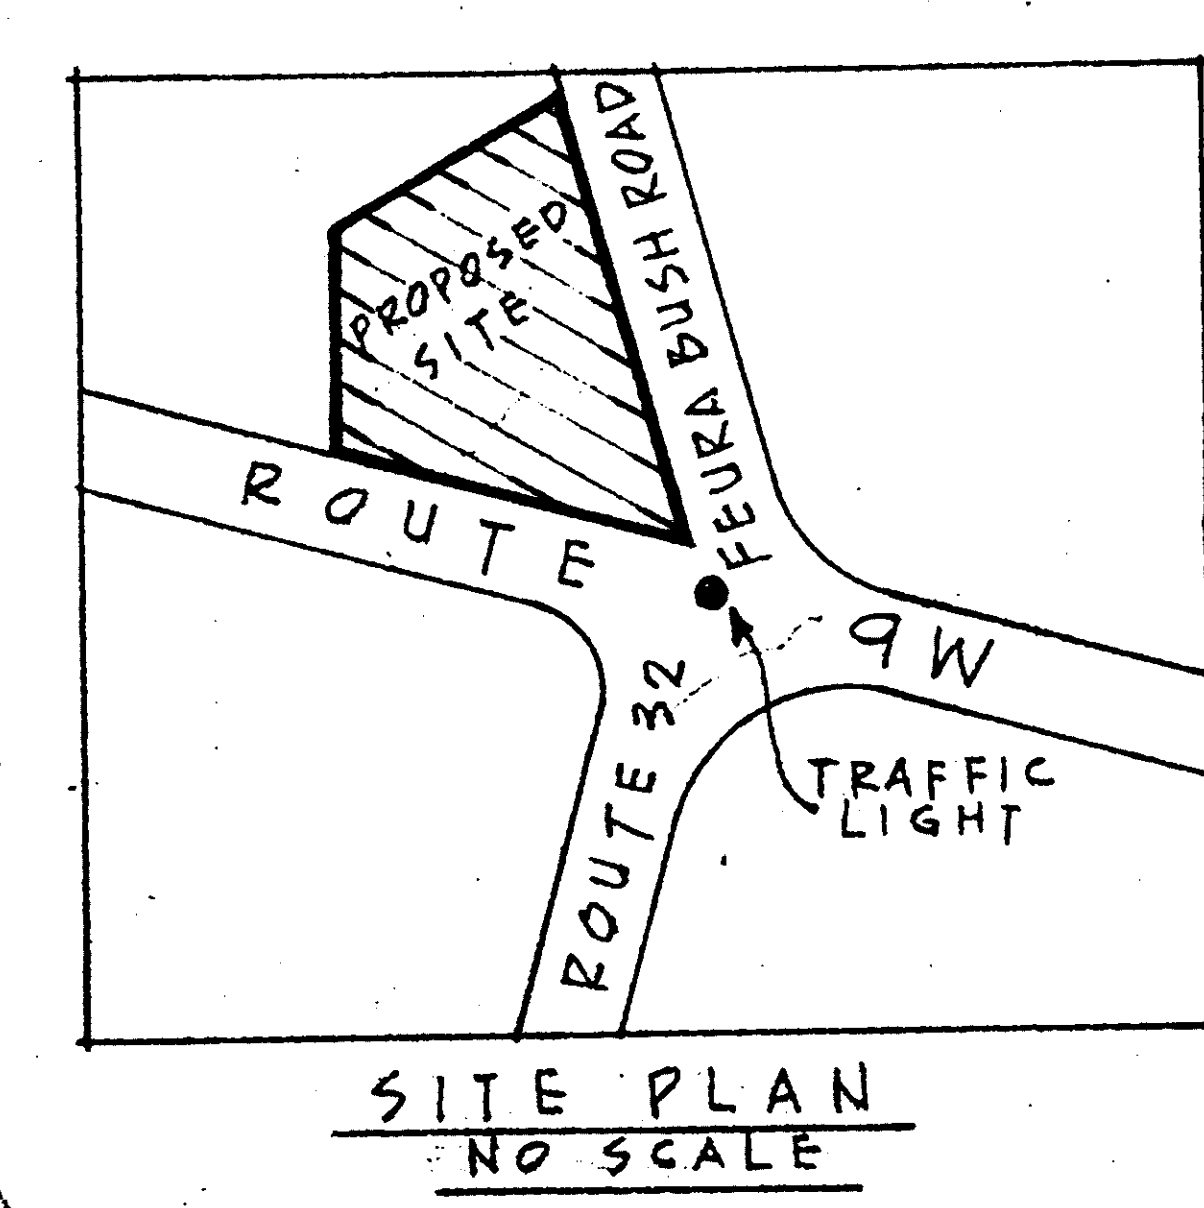


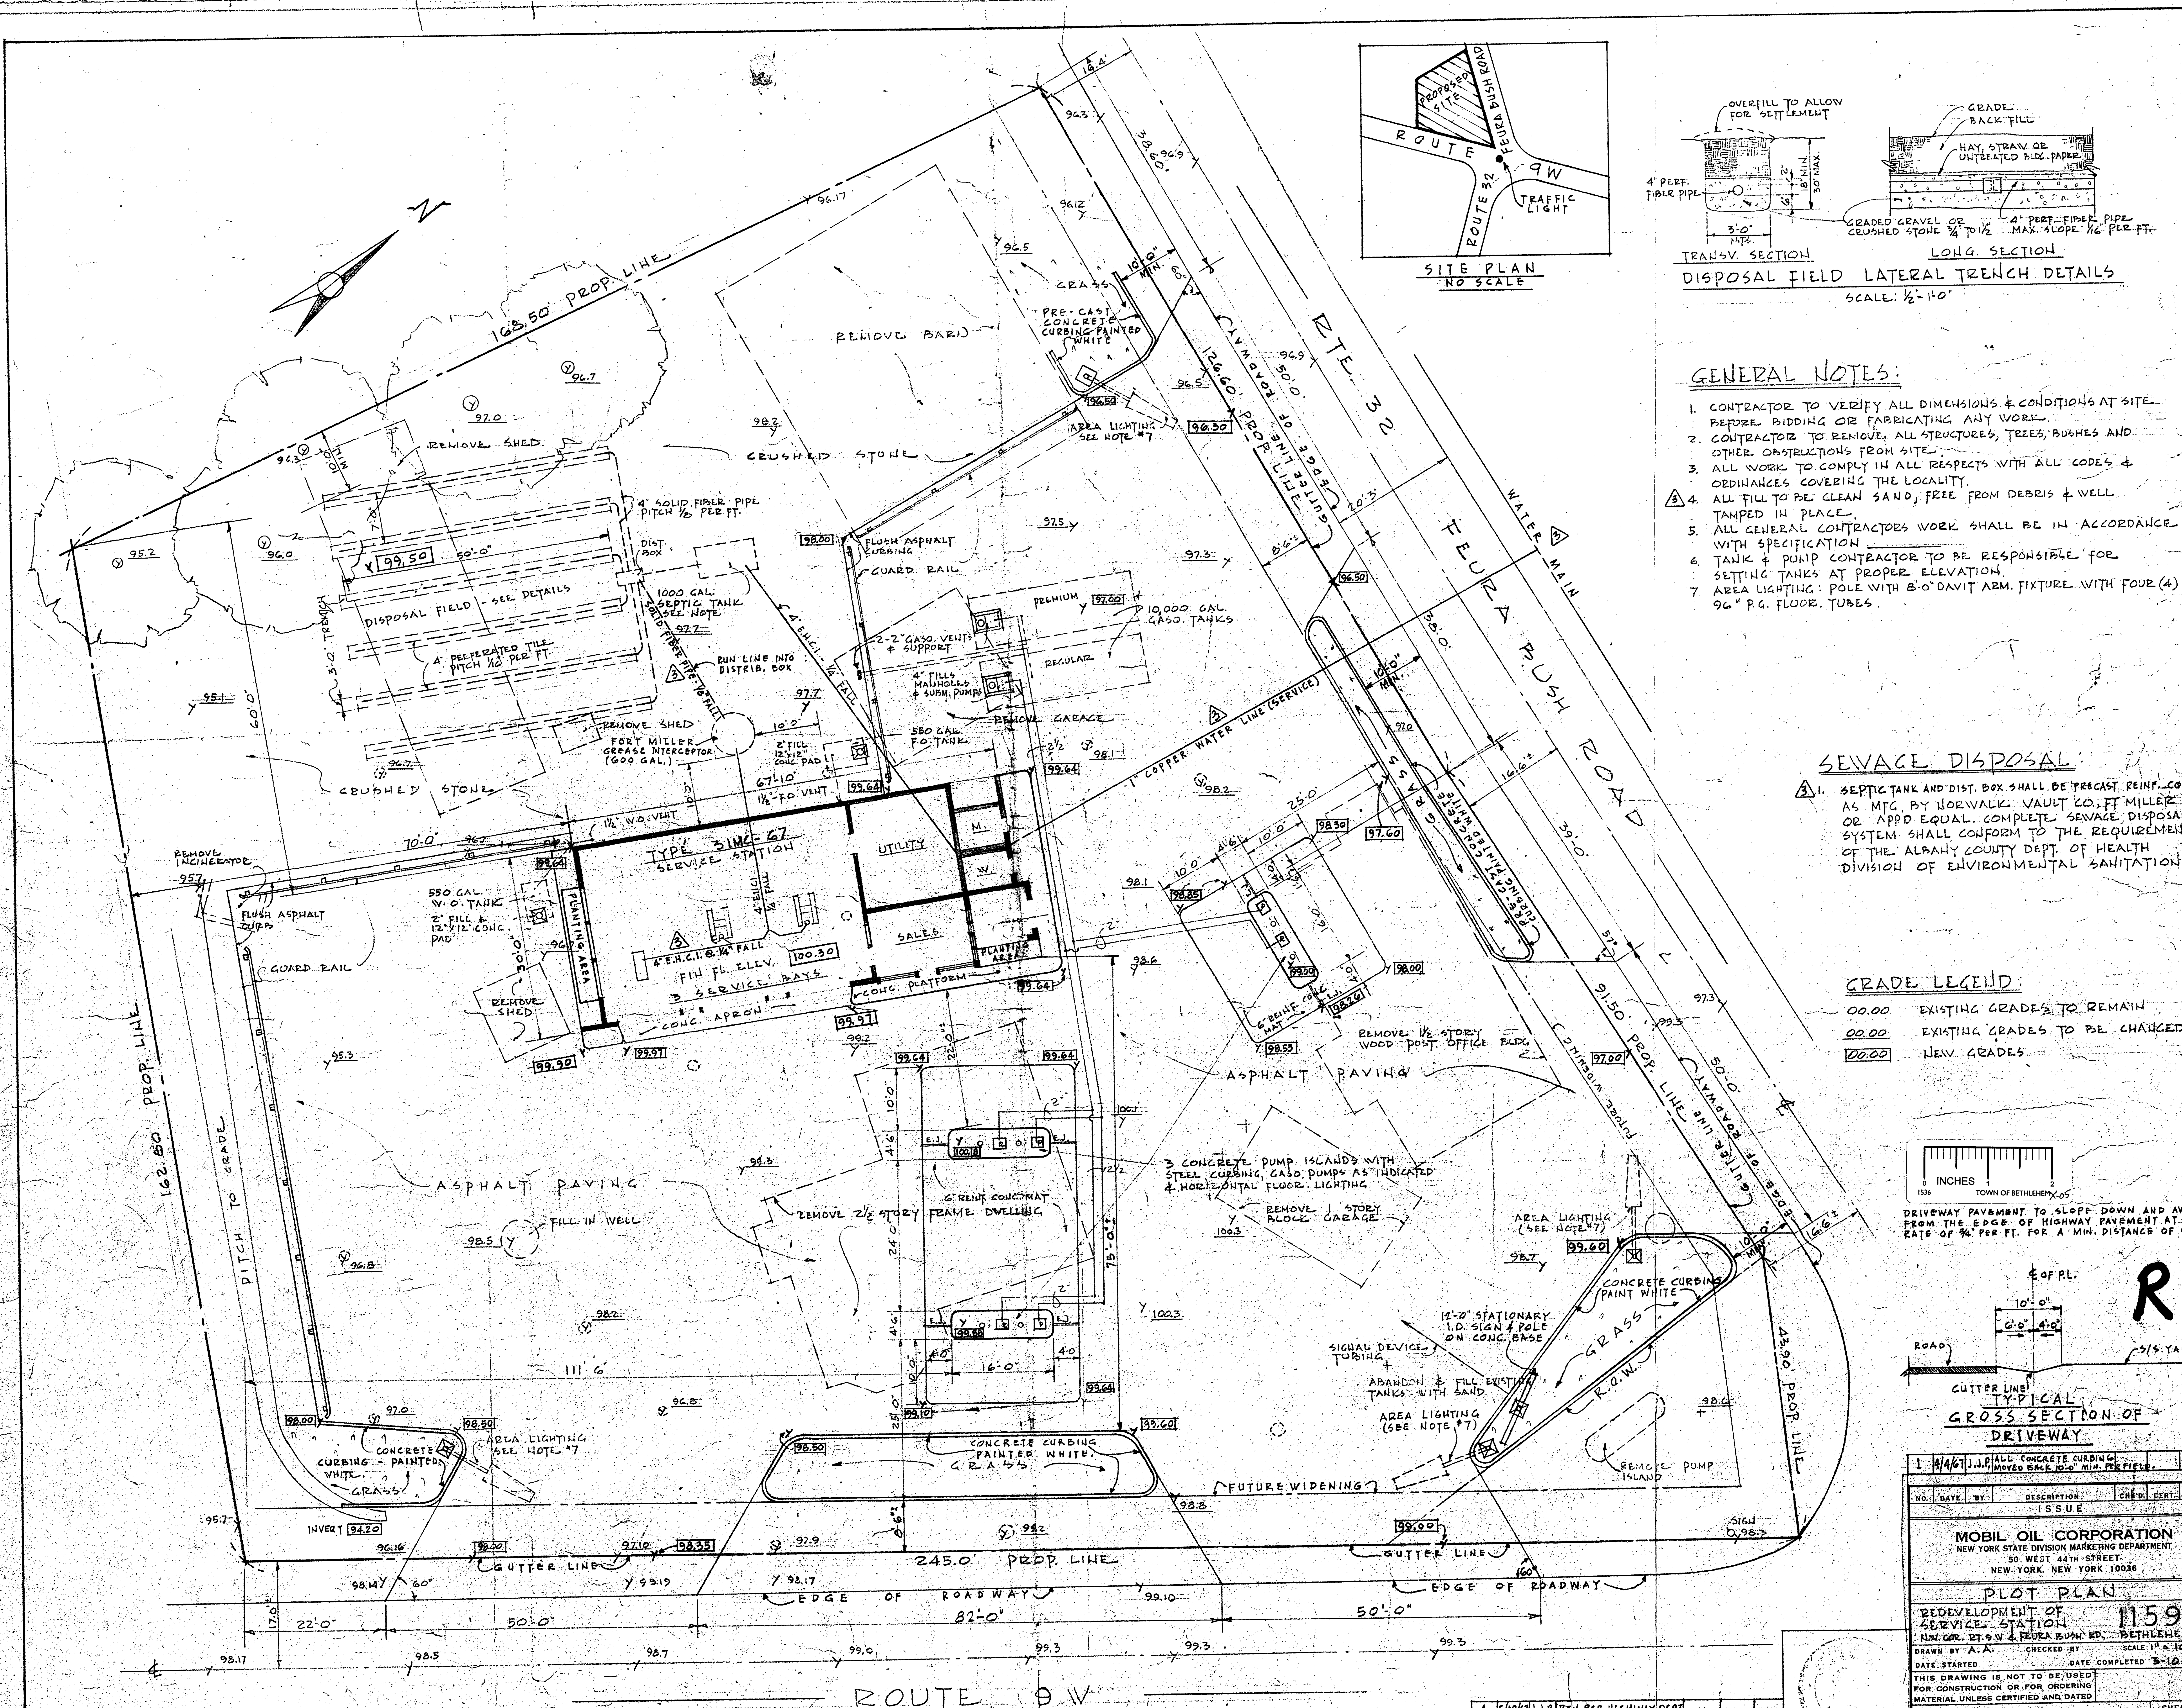

GENERAL NOTES:


1. CONTRACTOR TO VERIFY ALL DIMENSIONS & CONDITIONS AT SITE BEFORE BIDDING OR FABRICATING ANY WORK.
2. CONTRACTOR TO REMOVE ALL STRUCTURES, TREES, BUSHES AND OTHER OBSTRUCTIONS FROM SITE.
3. ALL WORK TO COMPLY IN ALL RESPECTS WITH ALL CODES & ORDINANCES COVERING THE LOCALITY.
4. ALL FILL TO BE CLEAN SAND, FREE FROM DEBRIS & WELL TAMPED IN PLACE.
5. ALL GENERAL CONTRACTORS WORK SHALL BE IN ACCORDANCE WITH SPECIFICATION.
6. TANK & PUMP CONTRACTOR TO BE RESPONSIBLE FOR SETTING TANKS AT PROPER ELEVATION.
7. AREA LIGHTING: POLE WITH 8'-0" DAVIT ARM, FIXTURE WITH FOUR (4) 96" P.G. FLOOR TUBES.

SEWAGE DISPOSAL


1. SEPTIC TANK AND DIST. BOX SHALL BE PRECAST REINF. CONCRETE AS MFG. BY HORN VALVE CO., FT. MILLER CO. OR APPD. EQUAL. COMPLETE SEWAGE DISPOSAL SYSTEM SHALL CONFORM TO THE REQUIREMENTS OF THE ALBANY COUNTY DEPT. OF HEALTH DIVISION OF ENVIRONMENTAL SANITATION.

GRADE LEGEND

- 00.00 EXISTING GRADES TO REMAIN
- 00.00 EXISTING GRADES TO BE CHANGED
- 00.00 NEW GRADES

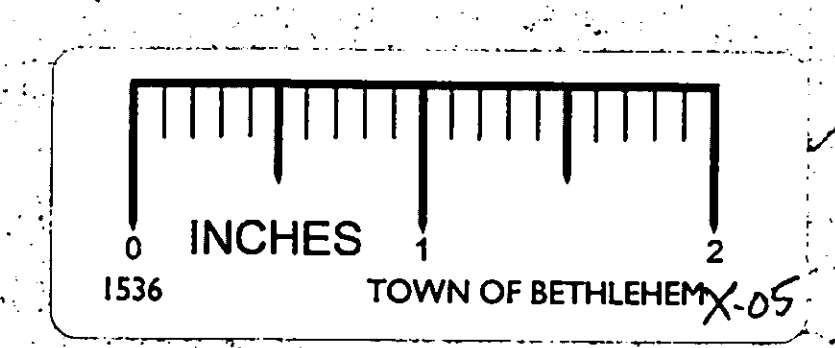

DRIVEWAY PAVEMENT TO SLOPE DOWN AND AWAY FROM THE EDGE OF HIGHWAY PAVEMENT AT A RATE OF 3/4" PER FT. FOR A MIN. DISTANCE OF 6'-0".

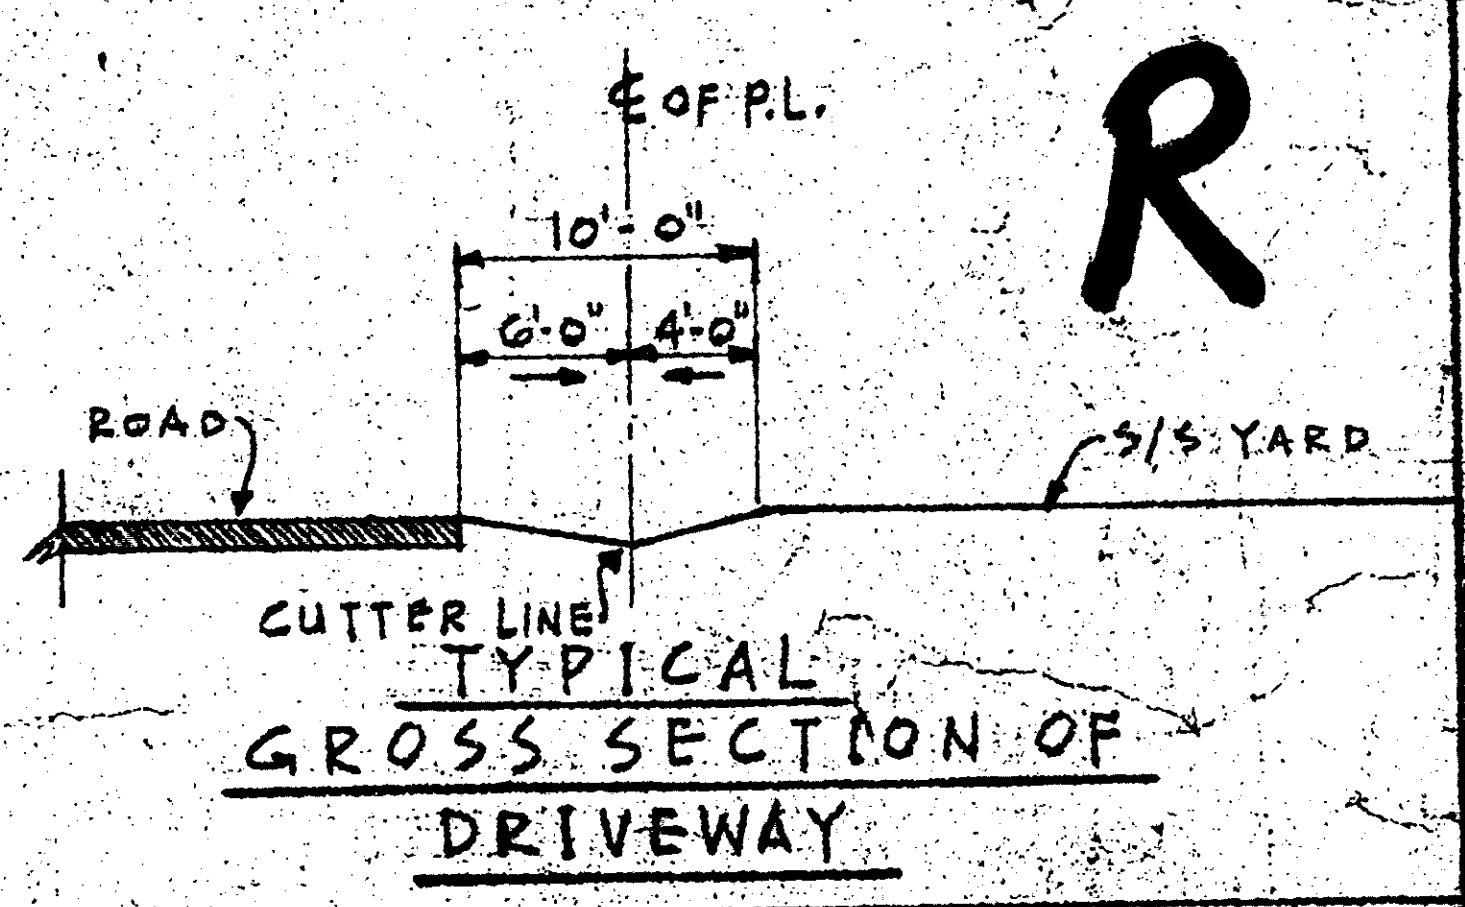

1 4/4/67 J.J.P. ALL CONCRETE CURBING MOVED BACK 10'-0" MIN. PER FIELD.			
NO.	DATE	BY	DESCRIPTION
ISSUE			
MOBIL OIL CORPORATION NEW YORK STATE DIVISION MARKETING DEPARTMENT 50 WEST 44TH STREET NEW YORK, NEW YORK 10036			
PLOT PLAN			
REDEVELOPMENT OF SERVICE STATION 11597			
NEW COR. RT. 9W & FEURA BUSH RD. BETHLEHEM, PA.			
DRAWN BY: A.A. CHECKED BY: DATE COMPLETED: 3-10-67			
THIS DRAWING IS NOT TO BE USED FOR CONSTRUCTION OR FOR ORDERING MATERIAL UNLESS CERTIFIED AND DATED			
APPROVALS			
DWG. NO. 11597-1			

4	5/18/67	J.J.P.	REV. PER HIGHWAY DEPT.
3	5/1/67	J.J.P.	REV. PER HEALTH DEPT. ADDITIONAL.
2	4/12/67	J.J.P.	APPROVED NEW GRADES.